



2026

ATTURO
TIRES

PRODUCT CATALOG



www.atturo.com



TRAIL BLADE SERIES

DESIGNED FOR WHATEVER TERRAIN YOU WISH TO CONQUER. THESE TIRES ARE READY FOR EVERYTHING FROM EXTREME TERRAINS TO THE DAILY DRIVE.

TABLE OF CONTENTS:


Trail Blade BOSS	02
Trail Blade MTS	03
Trail Blade M/T	04
Trail Blade X/T	05
Trail Blade ATS	06
Trail Blade A/T	07
Trail Blade H/T	08



TRAIL BLADE BOSS

LOOKS GREAT EVEN WHEN THINGS GET UGLY

Take control of the toughest terrain with a mighty off-road tread.

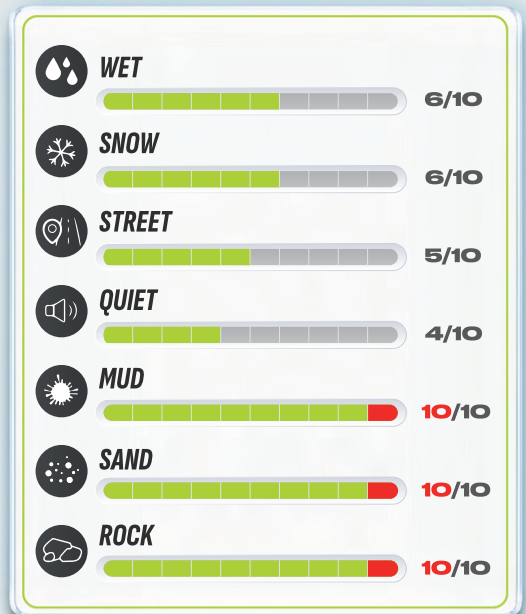

See page 24 for detailed sizing specifications



SPLIT CENTER BLOCK FLOWS

Allows water and debris to flow through, while maintaining rigidity when mountain climbing.

WAVE CHANNEL GRIPS

Improves traction and mitigates road thunder (at least a little).

OVERSIZED TREAD BLOCK CRUSHES

Provides the most robust, terrain-crushing power in the Trail Blade lineup.




SCAN QR CODE FOR DETAILED SIZING

specifications or visit www.atturo.com/sizing

TRAIL BLADE MTS

MUD WRESTLER DESIGNED TO DOMINATE

Cut through the slop with a heavy-duty tire that is ideal for trucks and off-road vehicles.

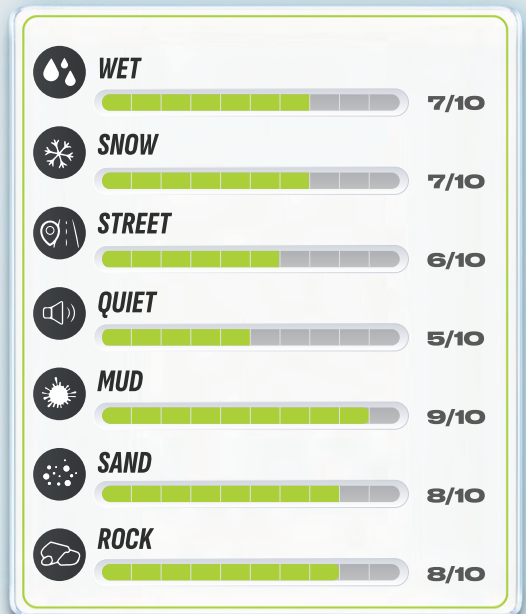

See page 24 for detailed sizing specifications



SERRATED EDGE CUTS

Encourages off-road mayhem.

SIPE COMBINATION CLEARS

Enhances traction in wet conditions, on or off-road.

QUAD CENTER GRABS

Boasts a unique look and doubles the biting edge grip.




SCAN QR CODE FOR
DETAILED SIZING
specifications or visit
www.atturo.com/sizing

TRAIL BLADE M/T

MENACING STYLE TREATS MUD LIKE DIRT

An affordable performance tire that is purpose-built for the messiest terrain.

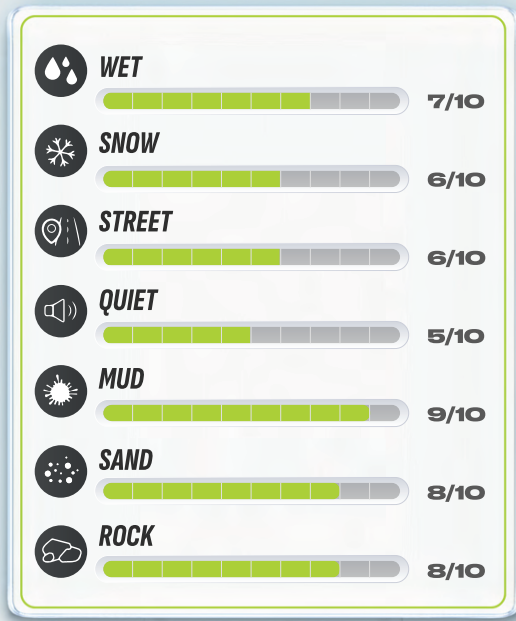

See page 25 for detailed sizing specifications



AGGRESSIVE TREAD GRIPS


Plows through just about anything you might encounter on the trail.

BEVELED EDGE BITES

Provides lateral grip when turning, especially on soft surfaces.

OPEN SHOULDER DRAINS

Helps eject mud, water, rocks, dirt, and more, providing easy cleanout and enhanced grip.



SCAN QR CODE FOR
DETAILED SIZING
specifications or visit
www.atturo.com/sizing

TRAIL BLADE X/T

THE ULTIMATE MULTI-TERRAIN

From mud to dirt to highway, enjoy the best of all possible rides.

★ 45K MILE WARRANTY
TRAIL BLADE X/T



	WET		8/10
	SNOW		7/10
	STREET		7/10
	QUIET		6/10
	MUD		8/10
	SAND		7/10
	ROCK		7/10

See page 26 for detailed sizing specifications



CENTER TREAD BLOCK STABILIZES


Improves stability on the highway by reducing tread squirm.

BLOCK SHAPE QUIETS

Finely sliced blocks reduce noise and allow water to flow out of the contact area.

LARGE SHOULDER BLOCK GRIPS

Delivers solid traction in offroad conditions.



SCAN QR CODE FOR DETAILED SIZING specifications or visit www.atturo.com/sizing


TRAIL BLADE ATS

STRIKING LOOK THAT DOES THE DIRTY WORK

Super sharp and tough, here's a stylishly aggressive tire that's ready for action on or off the asphalt.



ONLY 2024 OR NEWER PRODUCTION TIRES WILL BEAR THE 3PMS SYMBOL

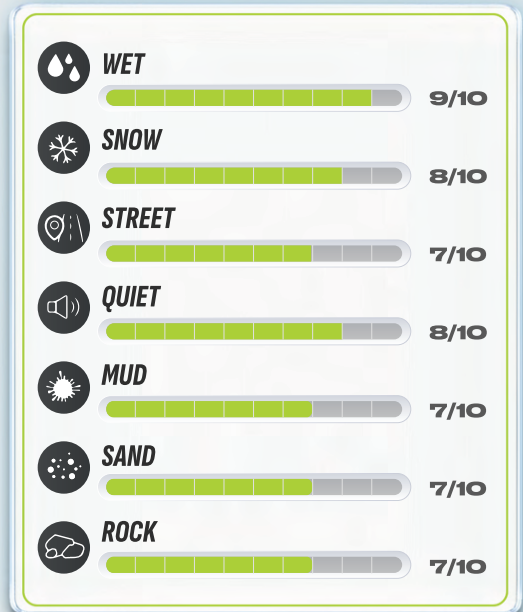

See page 27 for detailed sizing specifications



WIDE CHANNEL FLUSHES

Reduces noise and stops debris from taking a free ride.

CENTER RIB STABILIZES

Provides enhanced steering response and tire rigidity.

SHOULDER BLOCK GRINDS

Delivers consistent traction in all types of conditions.




SCAN QR CODE FOR DETAILED SIZING specifications or visit www.atturo.com/sizing

TRAIL BLADE A/T

DURABLE ALL-TERRAIN FOR WORK OR PLAY

The perfect fit for drivers who demand robustness, endurance, and outstanding performance in any driving conditions.

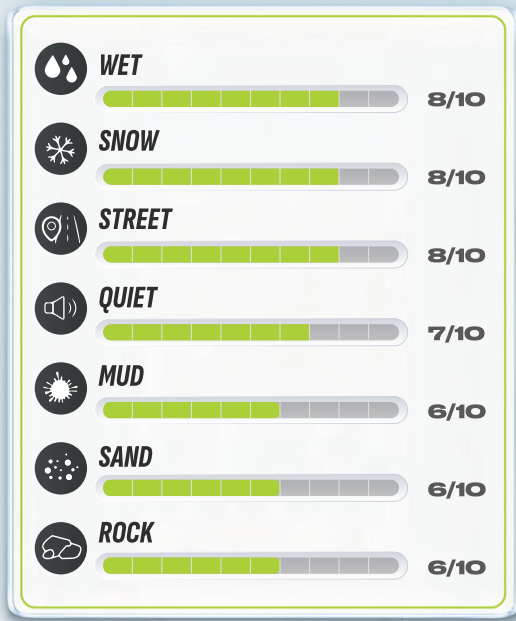

See page 28 for detailed sizing specifications



CENTER TREAD CONTROLS

Interlocked for stability and siped for traction in any weather condition.

WIDE CHANNEL VACUUMS

Linked to the lateral channels to vacuum water from the contact patch.

JAGGED SIPE GRIPS

Delivers optimal traction in all seasons.




SCAN QR CODE FOR
DETAILED SIZING
specifications or visit
www.atturo.com/sizing

TRAILBLADE H/T

UNLEASH ADVENTURE ANY ROAD, ANY SEASON

All-weather grip meets all-terrain freedom. Enjoy a smooth, quiet, long-lasting ride perfect for highway cruising and the occasional dirt road adventure.

60K
MILE WARRANTY
TRAILBLADE H/T

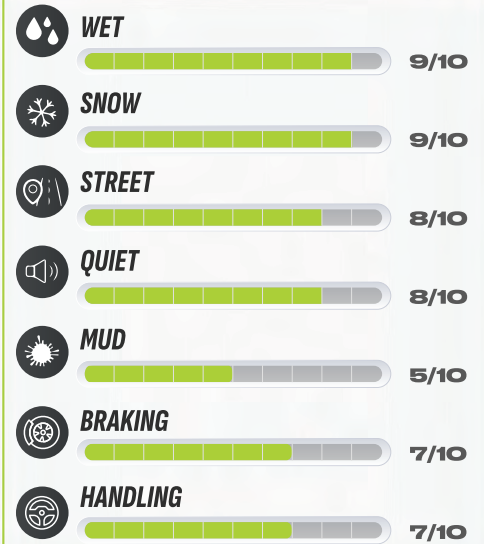

See page 29 for detailed sizing specifications



3 LINKED CENTER RIBS CONTROL

Delivers predictable handling and straight-line feel by being linked together to reduce tread squirm and provide additional stability.

3-D SIPES GRIP

Provides additional biting edges in wet, snowy, or icy conditions while reducing noise and enhancing the driving experience throughout the tire's entire tread life.

4 CIRCUMFERENTIAL GROOVES EVACUATE

Clears the contact patch of snow, slush, and water to ensure a constant, predictable, and controllable ride in any weather condition.



SCAN QR CODE FOR
DETAILED SIZING
specifications or visit
www.atturo.com/sizing

TRAIL BLADE SXS

**BORN FROM THE SAME DNA AS THEIR LT COUNTERPARTS,
THE SXS SERIES OF TIRES FEATURES RACE-INSPIRED DESIGNS.
8PR STEEL BELTED CONSTRUCTION, AN INTEGRATED RIM GUARD,
AND TRAIL HAZARD™ PROTECTION SPECIFICALLY FOR THE MODERN UTV!**

TABLE OF CONTENTS:

Trail Blade Boss SXS	10
Trail Blade X/T SXS	11




TRAIL BLADE BOSS SXS

RELENTLESS POWER WITH NO COMPROMISES

Plow through deep mud, sand, and rocks with the ultimate off-road tread at your side.

*Non-DOT

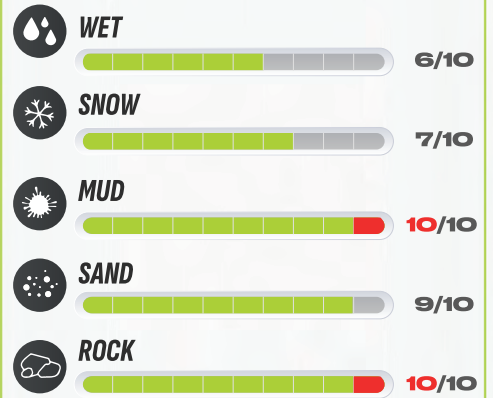

See page 30 for detailed sizing specifications



24-Month Trail Hazard™ Protection included at no additional charge with your Atturo Trail Blade SXS Tires. To learn more, visit Atturo.com/Trailhazard



HIGH VOID RATIO BITES

Creates massive biting edges and a tread pattern that cleans out with ease.

SPLIT TREAD BLOCKS CLEAR

Allows water and debris to flow through without sacrificing tread strength.

ALTERNATING SHOULDER GRABS

Tackles extreme terrain with the crushing power the Trail Blade BOSS is known for.



SCAN QR CODE FOR DETAILED SIZING

specifications or visit www.atturo.com/sizing

TRAIL BLADE X/T SXS

VERSATILE DESIGN FOR ANY TERRAIN

Outfit your UTV with a stylishly versatile tire built to perform while still delivering a stable, confident ride.

*Non-DOT



See page 30 for detailed sizing specifications



24-Month Trail Hazard™ Protection included at no additional charge with your Atturo Trail Blade SXS Tires. To learn more, visit Atturo.com/Trailhazard



HYBRID PATTERN EXCELS

Offers 90% of the off-road traction of an M/T, with a smoother ride on hard pack.

SIPING AND STUD PINS GRIP

Delivers elite traction and grip in rain, shine, or snow (especially when studded).

LARGE SHOULDER BLOCKS DIG

Provides exceptional traction in offroad conditions, similar to that of an M/T.



**SCAN QR CODE FOR
DETAILED SIZING**

specifications or visit
www.atturo.com/sizing

AZ SERIES

PERFORMANCE IS THE GAME AND THESE TIRES ARE WRITING THE RULES. WHETHER IT'S ON THE HIGHWAY OR RACEWAY, THESE TIRES ARE HERE TO PLAY.

TABLE OF CONTENTS:

AZ850 DR	13
AZ850	14
ARTIS	15
AZ810	17
AZ610	18
AZ600	19




AZ SERIES AZ850DR

A COMPLEMENT THAT REALLY STICKS

A rear-axle complement to the AZ850 on extra-sticky drag radials deliver elite stability from start to finish.


*DOT-Compliant

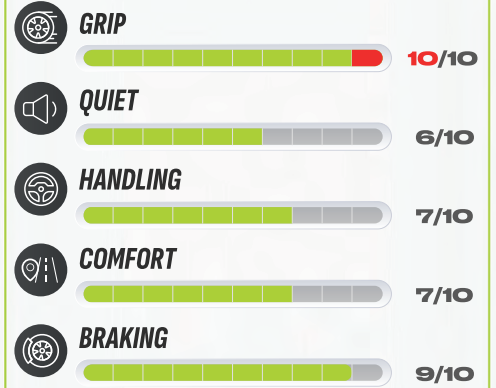

See page 31 for detailed sizing specifications



AZ850 Ultra-High Performance tire featured on the front wheels for the perfect pairing on your speed machine

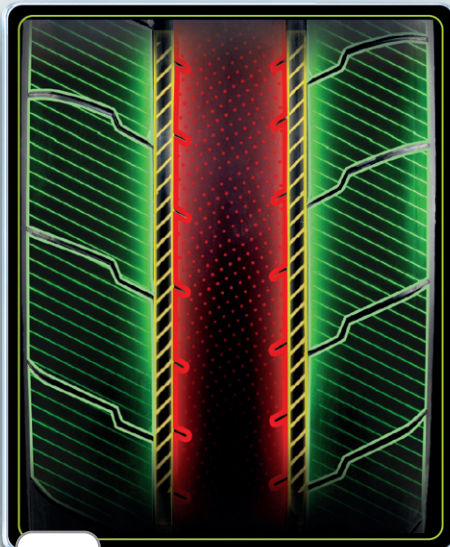

EXTRA-WIDE CENTER STABILIZES

Delivers improved, handling, and "on center" feel at race speeds.

DUAL WIDE CHANNELS QUIETS

Reduces tire noise both on the road and on the drag strip.

DIRECTIONAL SHOULDER GRIPS

Generates immediate launching traction with the help of an extra sticky compound.




**SCAN QR CODE FOR
DETAILED SIZING**

specifications or visit
www.atturo.com/sizing

AZ SERIES AZ850

THE STRONG & SILENT TYPE


This ultra-high performance tire delivers secure braking, handling, and durability.

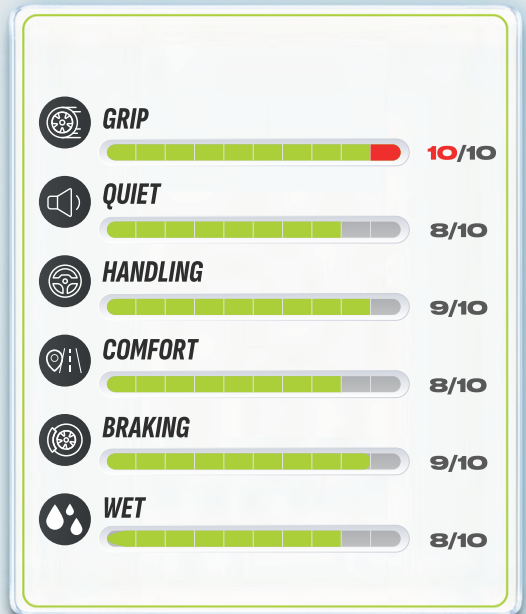

See page 31-33 for detailed sizing specifications



Power-hungry handling for **Sport Trucks, SUVs, Crossovers, & Muscle Cars.**

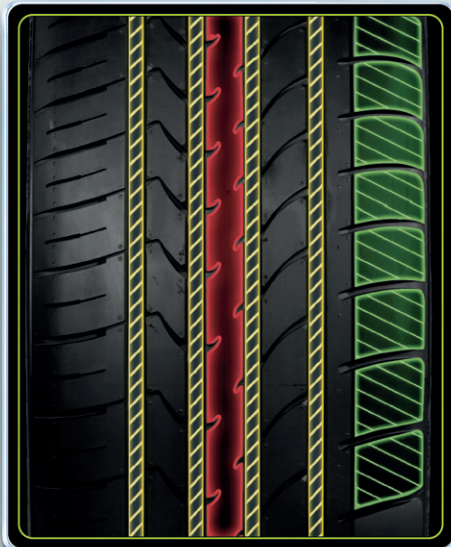

CENTER TREAD STABILIZES


Improves straight-line stability for a solid "on center" feel.

MAIN CHANNEL FLUSHES

Provides increased grip in wet road conditions.

SHOULDER TREAD BLOCK CORNERS

Remains rigid under stress for precise and predictable turning.



SCAN QR CODE FOR
DETAILED SIZING

specifications or visit
www.atturo.com/sizing

ARTIS TIRES



THE PARTNERSHIP: ATTURO TIRES & ARTIS FORGED


Atturo Tire and Artis Forged, a Southern California-based luxury wheel manufacturer, unified their expertise to create a first of its kind category: the Luxury High Performance tire.

Atturo brings two decades of proven tire engineering and performance pedigree. Artis Forged institute refined craftsmanship rooted in premium automotive culture. Together, we designed Artis LHP - a tire engineered specifically to complement ultra-premium vehicles and elevate the ownership experience.

ARTIS
TIRES

WHERE SILENCE BECOMES POWER

★ 40K ★
MILE WARRANTY
ARTIS

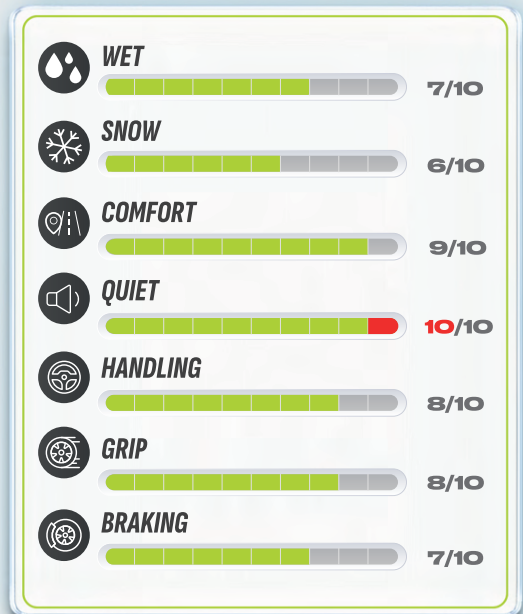

This is luxury revealed through seamless integration, where technology becomes invisible and experience becomes everything.

See page 33 for detailed sizing specifications



INTUITIVE CONNECTION

Precision geometry creates seamless driver-to-road communication.

INSTANT AUTHORITY

Engineered shoulder blocks deliver absolute stopping confidence.

SANCTUARY SILENCE

Acoustic engineering transforms your cabin into refined tranquility.

ALL-CONDITIONS COMMAND

Advanced water channels deliver unwavering control in every weather scenario.




SCAN QR CODE FOR
DETAILED SIZING

specifications or visit
www.atturo.com/sizing

AZ SERIES AZ810

THE ALL-WEATHER CHAMPION

Unlock peak Ultra-High-Performance for any vehicle, no matter the weather. Experience confident braking, precision handling, and a quiet journey on every road.

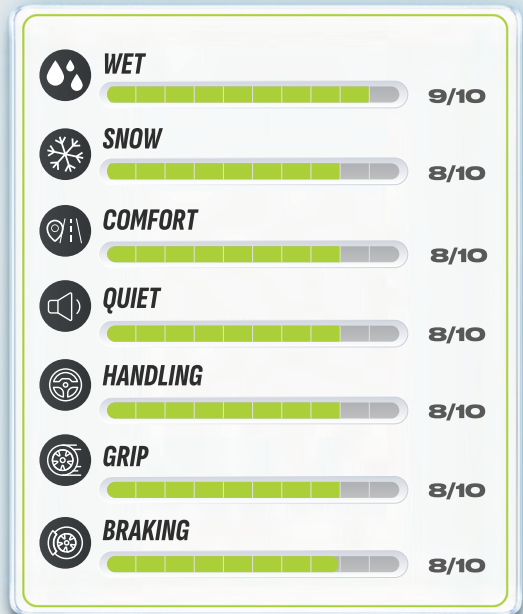

See page 34-35 for detailed sizing specifications



Engineered to include **electric and plug-in hybrid vehicles**, this tire delivers powerful handling that embraces the future of driving.



3-D SIPING GRIPS

Provides superior all weather traction throughout the life of the tire.

ASYMMETRIC PATTERN CONTROLS

Delivers confident and predictable handling in wet, dry, or snowy road conditions.

PITCHED TREAD BLOCKS QUIET

Acoustically optimized tread design with variable pitching delivers a quiet ride for EV and Hybrid vehicles.



SCAN QR CODE FOR
DETAILED SIZING


specifications or visit
www.atturo.com/sizing

AZ SERIES AZ610

GO ON TOUR

A super sharp all season tire that delivers a smooth, quiet ride.

60K
MILE WARRANTY
AZ610

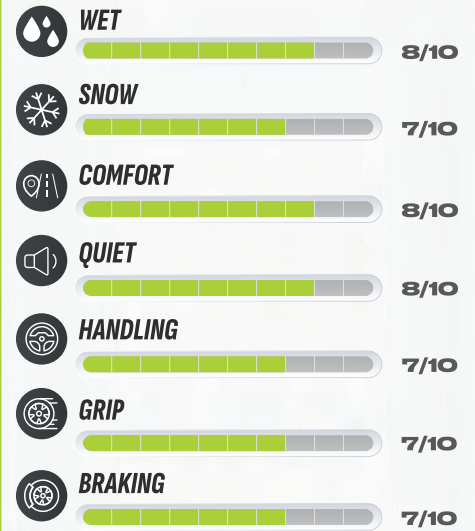

See page 36 for detailed sizing specifications



SLOPED SHOULDER CORNERS

Provides stable steering during aggressive cornering.

RIB SLOT QUIETS

Helps reduce road noise at both high and low speeds.

GROOVE FLUSHES

Improves water and slush evacuation while enhancing straight-line stability.




SCAN QR CODE FOR
DETAILED SIZING

specifications or visit
www.atturo.com/sizing

AZ SERIES AZ600

PERFORMANCE, STYLE, AND COMFORT.

Experience the ultimate blend of style and performance with this super sharp all-season tire, providing a smooth and tranquil journey.

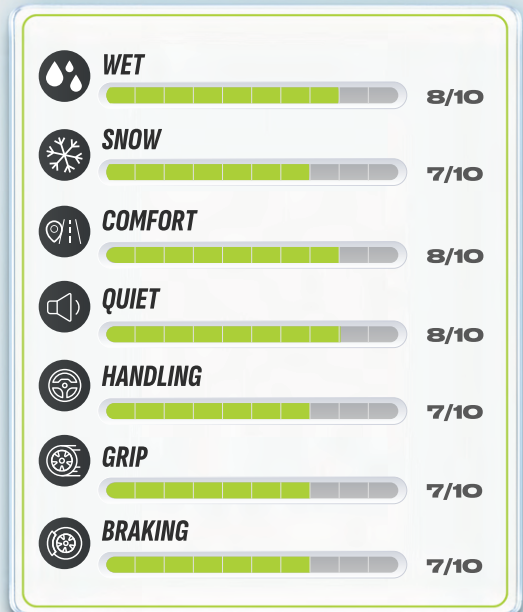

See page 37 for detailed sizing specifications



OUTSIDE RIBS HOLD

Center ribs work together to maintain a constant clear contact patch while providing stability at any speed.

SIPES BITE

Elongated shoulder block sipes work with smaller center tread sipes to offer stable all-weather traction.

GROOVE FLUSHES

Four circumferential grooves flush out water and slush to enhance stability.



**SCAN QR CODE FOR
DETAILED SIZING**

specifications or visit
www.atturo.com/sizing

FLEETLINE SERIES

**ONE OF THE FASTEST-GROWING VEHICLE SEGMENTS,
URBAN UTILITY VANS REQUIRE TIRES TO CARRY HEAVY
LOADS AT HIGH CENTERS OF GRAVITY.**

TABLE OF CONTENTS:

CV400	21
ST300	22




FLEETLINE CV400


VANTASTIC PERFORMANCE

Maintain your Euro-C equipped fleet with a tire that can take heavy loads while delivering a smooth ride in wet and dry conditions.

★ 40K ★
MILE WARRANTY
CV400

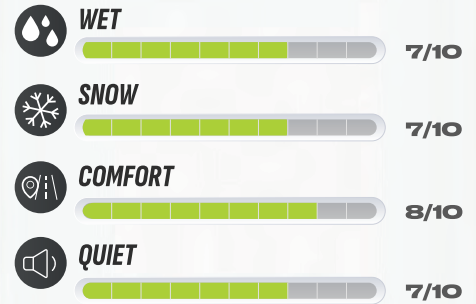

See page 38 for detailed sizing specifications

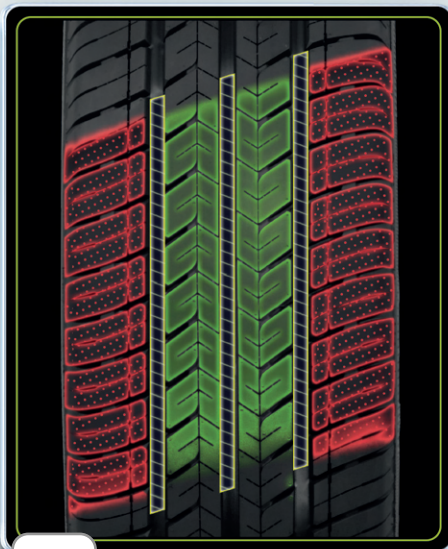

SHOULDER BLOCK HANDLES

Provides excellent traction in wet and dry conditions.

CIRCUMFERENTIAL GROOVES EXPELS

3 Circumferential grooves work with shoulder channels to keep the contact patch clean and dry for improved traction and braking.

INTERLOCKING TREAD STABILIZES

Optimized for high load-carrying capacity.



SCAN QR CODE FOR
DETAILED SIZING

specifications or visit
www.atturo.com/sizing

FLEETLINE ST300

WORK HARD PLAY HARDER

Engineered to handle heavy loads with ease, while providing a smooth ride in all conditions.



See page 38 for detailed sizing specifications



CHANNELS CLEANS

Provides excellent traction in wet and dry conditions.

CENTER RIB STABILIZES

Tracks your tow vehicle on the highway and keeps your trailer stable behind you.

INTERLOCKING TREAD QUIETS

Keeps your ride smooth and easy.



SCAN QR CODE FOR
DETAILED SIZING

specifications or visit
www.atturo.com/sizing



TIRE SPECIFICATIONS

Trail Blade BOSS	24
Trail Blade MTS	24
Trail Blade M/T	25
Trail Blade X/T	26
Trail Blade ATS	27
Trail Blade A/T	28
Trail Blade H/T	29
Trail Blade Boss SXS	30
Trail Blade X/T SXS	30
AZ850 DR	31
AZ850	31-33
ARTIS	33
AZ810	34-35
AZ610	36
AZ600	37
CV400	38
ST300	38

**ALL ATTURO TIRES ARE SUITABLE FOR HYBRID AND ELECTRIC VEHICLES
AS LONG AS THEY MEET O.E. LOAD AND SPEED RATINGS**

TRAIL BLADE **BOSS**

See **page 2** for more Trail Blade BOSS details

Rim Size	Atturo Item Number	New Item Number	Size	Speed Rating Load Index	PLY Rating	Overall Diameter Inches	Section Width Inches	Approved Rim Width	Tread Depth 1/32 Inches	Weight LBS	Max PSI	Max Load Single LBS	Max Load Dual LBS
17"	TBBO-J5QE7ATA	10001	37x12.50R17LT	124Q	8 PR	36.5	12.5	9.5 - 10.5	22	73.4	50	3527	-
	TBBO-LMFY6MB	10002	37x12.50R17LT RWL	124Q	8 PR	36.5	12.5	9.5 - 10.5	22	73.4	50	3527	-
	TBBO-J53G7ATA	10003	40x13.50R17LT	136Q	10 PR	39.8	13.6	8.5 - 11.0	22	102.0	65	4938	-
18"	TBBO-J53E8ATA	10004	37x13.50R18LT	128Q	10 PR	36.5	13.6	10.5 - 11.5	22	80.5	65	3968	-
	TBBO-PK5Y6MB	10005	37x13.50R18LT RWL	128Q	10 PR	36.5	13.6	10.5 - 11.5	22	80.5	65	3968	-
20"	TBBO-J56OAF6	10006	38x14.50R20LT	124Q	8 PR	37.8	14.6	10.0 - 12.0	22	90.4	50	3527	-
	TBBO-J56GOAF6	10007	40x14.50R20LT	129Q	8 PR	39.8	14.6	10.0 - 12.0	22	96.1	50	4079	-

TRAIL BLADE **MTS**

See **page 3** for more Trail Blade MTS details


Rim Size	Atturo Item Number	New Item Number	Size	Speed Rating Load Index	PLY Rating	Overall Diameter Inches	Section Width Inches	Approved Rim Width	Tread Depth 1/32 Inches	Weight LBS	Max PSI	Max Load Single LBS	Max Load Dual LBS
16"	11018	11018	LT315/75R16	127/124S	10 PR	34.6	12.3	8.5 - 9.5	21	64.9	80	3858	3527
17"	TBMS-LMFT2MA	11001	37x12.50R17LT	124Q	8 PR	36.5	12.5	8.5 - 11.0	21	74.4	50	3527	-
18"	TBMS-ML5T2MA	11002	LT325/65R18	127/124T	10 PR	34.6	13.0	9.0 - 12.0	21	75.8	65	3858	3527
	TBMS-LH5T2MA	11003	33x12.50R18LT	122Q	12 PR	32.5	12.5	8.5 - 11.0	22	67.8	80	3307	-
	TBMS-LK5T2MA	11004	35x12.50R18LT	128Q	12 PR	34.5	12.5	8.5 - 11.0	22	72.8	80	3968	-
20"	TBMS-JFT2MA	11005	LT295/55R20	123/120Q	10 PR	32.8	12.2	8.5 - 10.5	20	64.0	80	3417	3086
	11019	11019	LT275/60R20	123/120S	10 PR	33.0	11.0	7.5 - 8.5	20	57.2	80	3417	3086
	TBMS-PEJT2MA	11006	33x13.50R20LT	121Q	12 PR	32.5	13.6	9.5 - 12.0	22	70.3	80	3197	-
	TBMS-PFJT2MA	11007	35x13.50R20LT	126Q	12 PR	35.0	13.6	9.5 - 12.0	21	75.7	80	3748	-
22"	TBMS-HDLM2MA	11008	285/45R22	114S XL	-	32.1	11.2	9.0 - 10.5	17	44.9	50	2601	-
	TBMS-HFLT2MA	11009	LT285/55R22	124/121Q	10 PR	34.4	11.7	8.5 - 10.0	20	65.2	80	3527	3197
	TBMS-PCLT2MA	11010	33x13.50R22LT	114Q	10 PR	32.5	13.6	9.5 - 12.0	22	68.2	65	2601	-
	TBMS-PELT2MA	11011	35x13.50R22LT	123Q	12 PR	34.5	13.6	9.5 - 12.0	22	75.1	80	3417	-
24"	TBMS-PBNT2MA	11012	33x13.50R24LT	107Q	10 PR	32.5	13.6	9.5 - 12.0	22	67.4	65	2150	-
	TBMS-PCNT2MA	11013	35x13.50R24LT	116Q	10 PR	35.0	13.6	11.5 - 13.5	21	73.3	65	2756	-
	TBMS-PENT2MA	11014	37x13.50R24LT	124Q	12 PR	36.5	13.6	9.5 - 12.0	22	80.3	80	3527	-
26"	TBMS-WART2MA	11015	LT385/30R26	125Q	12 PR	35.1	16.5	13.5 - 14.5	21	85.5	80	3638	-
	TBMS-PBRT2MA	11016	35x13.50R26LT	123Q	12 PR	34.5	13.6	10.0 - 12.0	21	74.3	80	3417	-
	TBMS-PCRT2MA	11017	37x13.50R26LT	125Q	12 PR	36.5	13.6	9.5 - 12.0	21	80.6	80	3638	-



2016 WINNER
SEMA Global Media Award

TRAIL BLADE BOSS FACTS

Integrated into both the sidewall and center tread, the Trail Blade BOSS features design elements inspired by the kukri-style knife. The blade and handle shapes are reflected throughout the BOSS' massive center tread and bold sidewall elements.

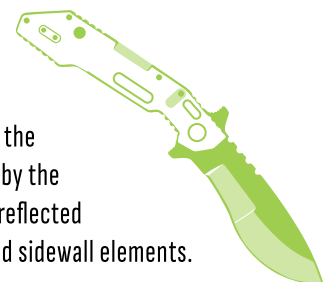

TRAIL BLADE M/T

See page 4 for more Trail Blade M/T details

Rim Size	Atturo Item Number	New Item Number	Size	Speed Rating Load Index	PLY Rating	Overall Diameter Inches	Section Width Inches	Approved Rim Width	Tread Depth 1/32 Inches	Weight LBS	Max PSI	Max Load Single LBS	Max Load Dual LBS
16"	TBMT-BNEM2MA	12001	LT235/85R16	120/116Q	10 PR	31.7	9.3	6.0 - 7.5	21	48.8	80	3042	2778
	TBMT-CREM2MA	12002	LT245/75R16	120/116Q	10 PR	30.5	9.8	6.5 - 8.0	21	48.3	80	3042	2778
	TBMT-EREM2MA	12003	LT265/75R16	123/120Q	10 PR	31.9	10.4	7.0 - 9.0	21	55.8	80	3417	3086
	TBMT-EREM2MB	12004	LT265/75R16 RWL	123/120Q	10 PR	31.7	10.5	7.0 - 8.0	21	56.3	80	3417	3086
	TBMT-HREM2MA	12005	LT285/75R16	126/123Q	10 PR	33.1	11.3	7.5 - 9.5	21	61.2	80	3748	3417
	TBMT-HREM2MB	12006	LT285/75R16 RWL	126/123Q	10 PR	32.8	11.3	7.5 - 9.5	21	62.2	80	3748	3417
17"	TBMT-EKFM2MA	12007	LT265/70R17	121/118Q	10 PR	31.9	10.7	7.0 - 9.0	21	56.9	80	3197	2910
	TBMT-EKFM2MB	12008	LT265/70R17 RWL	121/118Q	10 PR	31.7	10.7	7.5 - 8.5	21	56.9	80	3197	2910
	TBMT-LLFM2MA	12009	33x12.50R17LT	114Q	8 PR	32.8	12.5	8.5 - 11.0	21	66.0	50	2601	-
	TBMT-LKFM2MA	12010	35x12.50R17LT	121Q	10 PR	34.8	12.5	8.0 - 10.5	21	70.7	65	3197	-
18"	TBMT-FL5M2MA	12011	LT275/65R18	123/120Q	10 PR	32.3	11.0	8.0 - 9.5	21	59.2	80	3417	3086
	TBMT-FL5M2MB	12012	LT275/65R18 RWL	123/120Q	10 PR	32.1	11.0	7.5 - 8.5	21	59.2	80	3417	3086
	TBMT-FK5M2MA	12013	LT275/70R18	125/122Q	10 PR	33.2	11.0	7.0 - 9.0	19	60.0	80	3638	3307
	TBMT-LH5M2MA	12014	33x12.50R18LT	118Q	10 PR	32.8	12.5	8.5 - 11.0	21	65.5	65	2910	-
	TBMT-LK5M2MA	12015	35x12.50R18LT	123Q	10 PR	34.8	12.5	8.5 - 11.0	21	70.9	65	3417	-
	TBMT-LK5M2MB	12016	35x12.50R18LT RWL	123Q	10 PR	34.5	12.5	9.5 - 10.5	21	70.9	65	3417	-
	TBMT-PK5M2MA	12017	37x13.50R18LT	128Q	10 PR	36.5	13.6	9.0 - 11.5	20	79.8	65	3968	-
	TBMT-PK5M2MB	12018	37x13.50R18LT RWL	128Q	10 PR	36.5	13.6	10.5 - 11.5	20	79.8	65	3968	-
19"	TBMT-DFHM2MA	12019	255/55R19	111S XL	-	30.0	10.4	7.0 - 9.0	16	43.1	50	2403	-
20"	TBMT-HEJM2MA	12020	LT285/50R20	119/116R	10 PR	31.5	11.7	8.5 - 10	20	57.5	80	2998	2756
	TBMT-LEJM2MA	12021	33x12.50R20LT	114Q	10 PR	32.8	12.5	8.5 - 11.0	21	64.9	65	2601	-
	TBMT-LHJM2MA	12022	35x12.50R20LT	121Q	10 PR	34.8	12.5	8.5 - 11.0	21	70.5	65	3197	-
	TBMT-PLJM2MA	12023	37x13.50R20LT	127Q	10 PR	36.8	13.6	9.5 - 12.0	21	82.4	65	3858	-
22"	TBMT-LDLM2MA	12024	33x12.50R22LT	109Q	10 PR	32.8	12.5	8.5 - 11.0	21	62.8	65	2271	-
	TBMT-LELM2MA	12025	35x12.50R22LT	117Q	10 PR	34.8	12.5	8.5 - 11.0	21	70.2	65	2833	-
	TBMT-PFLM2MA	12026	37x13.50R22LT	123Q	10 PR	36.8	13.6	9.5 - 12.0	21	81.3	65	3417	-



TRAIL BLADE MTS FACTS

Introduced in 2019 and optimized from Atturo's flagship Trail Blade M/T design. The Trail Blade MTS pays homage to the signature Trail Blade concept that started it all, including a design influenced by the karambit-style knife. Featuring design elements inspired by Atturo's short-course racing teams, this evolution resulted in the sportier, performance-enhanced M/T.

TRAIL BLADE M/T FACTS

First available Atturo tire in the mud-terrain line in 2012 and stemming from the utility of its karambit-style blade, this technology-driven mud-terrain tire was designed to claw and gouge through the toughest terrain.

TRAIL BLADE X/T

See page 5 for more Trail Blade X/T details

Rim Size	Atturo Item Number	New Item Number	Size	Speed Rating Load Index	PLY Rating	Overall Diameter Inches	Section Width Inches	Approved Rim Width	Tread Depth 1/32 Inches	Weight LBS	Max PSI	Max Load Single LBS	Max Load Dual LBS
17"	TBXT-BLFR3PA	13001	235/65R17	108H XL	-	29.1	9.4	6.5 - 8.5	14	34.6	50	2205	-
	TBXT-DRFR3LA	13002	LT255/75R17	111/108S	6 PR	32.0	10.0	6.5 - 8.5	17	48.8	50	2403	2205
	TBXT-HKFR3LA	13003	LT285/70R17	121/118Q	10 PR	32.8	11.5	7.5 - 9.5	17	57.9	80	3197	2910
	TBXT-JKFR3LA	13004	LT295/70R17	121/118Q	10 PR	33.3	11.8	7.5 - 10.0	16	58.4	80	3197	2910
	TBXT-LKFR3LA	13005	35x12.50R17LT	121Q	10 PR	34.5	12.5	8.0 - 10.5	18	70.0	65	3197	-
	TBXT-LMFR3LA	13006	37x12.50R17LT	124Q	8 PR	36.5	12.5	8.5 - 11.0	18	70.0	50	3527	-
18"	TBXT-BH5R3PA	13007	235/60R18	107H XL	-	29.1	9.4	6.5 - 8.5	14	33.0	50	2149	-
	TBXT-DK5R3LA	13008	LT255/70R18	117/114S	8 PR	32.1	10.2	6.5 - 8.5	17	50.9	65	2833	2601
	TBXT-FK5R3LA	13009	LT275/70R18	125/122Q	10 PR	33.2	11.0	7.0 - 8.5	18	61.3	80	3638	3307
	TBXT-HH5R3PA	13010	285/60R18	120H XL	-	31.5	11.5	8.0 - 10.0	14	44.7	50	3086	-
	TBXT-HL5R3LA	13011	LT285/65R18	125/122Q	10 PR	32.6	11.5	8.5 - 10.0	17	58.6	80	3638	3307
	TBXT-JK5R3LA	13012	LT295/70R18	129/126Q	10 PR	34.3	11.8	7.5 - 10.0	18	65.5	80	4079	3748
	TBXT-LH5R3LA	13013	33x12.50R18LT	118Q	10 PR	32.5	12.5	8.5 - 11.0	18	65.1	65	2910	-
	TBXT-LK5R3LA	13014	35x12.50R18LT	123Q	10 PR	34.5	12.5	8.5 - 11.0	18	70.1	65	3417	-
	TBXT-LK5R3LB	13015	35x12.50R18LT RWL	123Q	10 PR	34.5	12.5	9.5 - 10.5	18	70.1	65	3417	-
20"	TBXT-EEJR3PA	13016	265/50R20	112H XL	-	30.5	10.9	7.5 - 9.5	14	42.5	50	2469	-
	TBXT-EHJR3LA	13017	LT265/60R20	121/118S	10 PR	32.5	10.7	8.0 - 9.5	17	56.5	80	3197	2910
	TBXT-FDJR3PA	13018	275/45R20	110H XL	-	29.8	10.7	8.5 - 10.5	14	36.8	50	2337	-
	TBXT-FFJR3PA	13019	275/55R20	117S XL	-	31.9	11.2	7.5 - 9.5	14	44.2	50	2833	-
	TBXT-FLJR3LA	13020	LT275/65R20	126/123Q	10 PR	34.1	11.0	7.5 - 9.5	18	62.1	80	3748	3417
	TBXT-HFJR3LA	13021	LT285/55R20	122/119Q	10 PR	32.4	11.7	8.0 - 10.0	18	60.3	80	3307	2998
	TBXT-JHJR3LA	13022	LT295/60R20	126/123R	10 PR	33.9	11.8	8.5 - 10.5	17	60.9	80	3748	3417
	TBXT-KEJR3LA	13023	LT305/50R20	121/118Q	12 PR	32.0	12.4	9.0 - 11.0	17	61.3	80	3197	2910
	TBXT-KFJR3LA	13024	LT305/55R20	121/118Q	10 PR	33.2	12.4	8.5 - 11.0	18	64.9	65	3197	2910
	TBXT-LEJR3LA	13025	33x12.50R20LT	114Q	10 PR	32.5	12.5	8.5 - 11.0	18	64.0	65	2601	-
	TBXT-LHJR3LA	13026	35x12.50R20LT	121Q	10 PR	34.5	12.5	8.5 - 11.0	18	69.9	65	3197	-
22"	TBXT-FDLR3PA	13027	275/45R22	112H XL	-	31.8	10.7	8.5 - 10.5	14	43.0	50	2469	-
	TBXT-KDLR3PA	13028	305/45R22	118H XL	-	32.8	11.9	9.5 - 11.5	14	48.0	50	2910	-
	TBXT-MELR3LA	13029	LT325/50R22	122S	10 PR	34.8	13.2	9.0 - 12.0	18	69.7	65	3306	-
24"	TBXT-HCNR3PA	13030	285/40R24	112H XL	-	33.0	11.4	9.5 - 11.0	14	46.4	50	2469	-
	TBXT-MDNR3LA	13031	LT325/45R24	120S	10 PR	35.5	12.8	9.0 - 12.0	14	65.5	65	3086	-
	TBXT-PENR3LA	13032	LT345/50R24	125Q	10 PR	37.6	14.2	10.0 - 12.0	18	81.6	65	3637	-
26"	TBXT-KARR3PA	13033	305/30R26	109H XL	-	33.2	12.3	10.5 - 11.5	14	47.6	50	2756	-



2014 WINNER
SEMA Global Media Award

TRAIL BLADE X/T FACTS



Designed and modeled after an everyday-carry utility knife, the Atturo Trail Blade X/T pairs simplicity with a durable, purpose-built construction for real-world use. Reflecting that same philosophy, the X/T maintains the aggressive styling of a mud-terrain tire while delivering improved on-road manners for a more balanced, all-purpose driving experience.

TRAIL BLADE **ATS**

See **page 6** for more Trail Blade ATS details

Rim Size	Atturo Item Number	New Item Number	Size	Speed Rating Load Index	PLY Rating	Overall Diameter Inches	Section Width Inches	Approved Rim Width	Tread Depth 1/32 Inches	Weight LBS	Max PSI	Max Load Single LBS	Max Load Dual LBS
16"	TBAS-BLER4CA	15001	235/65R16C	121/119R	10 PR	28.0	9.4	6.5 - 7.5	14	39.1	82	3197	2998
	TBAS-AHFBKPA	15002	225/60R17	103H XL	-	27.6	9.0	6.0 - 7.0	11	27.3	49	1929	-
17"	TBAS-ALFBKPA	15003	225/65R17	106H XL	-	28.5	9.0	6.0 - 7.0	11	28.2	49	2094	-
	TBAS-CLFR4PA	15004	245/65R17	111Q XL	-	29.5	9.8	7.0 - 8.5	15	37.5	50	2403	-
	TBAS-CKFR4LA	15005	LT245/70R17	119/116S	10 PR	30.6	9.8	6.5 - 8.0	17	46.5	80	2998	2756
	15026	15026	LT275/70R17	124/121T	10 PR	32.2	11.0	7.5 - 8.5	15	50.8	80	3525	3195
	TBAS-LKFR4LA	15006	LT315/70R17	121/118Q	10 PR	34.4	12.7	8.0 - 9.5	16	66.1	65	3197	2910
	TBAS-LLFR4LA	15007	33x12.50R17LT	120Q	10 PR	32.5	12.5	8.5 - 11.0	17	61.7	65	3086	-
	15027	15027	225/55R18	102H XL	-	27.8	9.2	6.5 - 7.5	11	27.4	49	1874	-
18"	TBAS-AH5BKPA	15008	225/60R18	104H XL	-	28.6	9.0	6.0 - 7.0	11	31.0	49	2094	-
	TBAS-CH5R4PA	15009	245/60R18	109Q XL	-	29.6	9.8	7.0 - 8.5	15	35.8	50	2271	-
	TBAS-EH5R4PA	15010	265/60R18	110S	-	30.5	10.7	7.5 - 9.5	15	39.5	44	2337	-
	TBAS-EL5R4PA	15011	265/65R18	116T XL	-	31.5	10.7	7.5 - 9.5	13	41.0	50	2756	-
	TBAS-EK5R4LA	15012	LT265/70R18	124/121S	10 PR	32.6	10.7	7.0 - 9.0	17	55.4	80	3527	3197
	TBAS-FL5R4LA	15013	LT275/65R18	123/120S	10 PR	32.1	11.0	8.0 - 9.5	17	55.0	80	3417	3086
	15028	15028	33x12.50R18LT	122S	12 PR	32.5	12.5	9.5 - 10.5	15	59.9	80	3305	-
	15029	15029	35x12.50R18LT	128S	12 PR	34.5	12.5	9.5 - 10.5	15	63.2	80	3970	-
	TBAS-PK5R4LA	15014	37x13.50R18LT	128Q	10 PR	36.5	13.6	9.5 - 11.5	16	73.7	65	3968	-
	TBAS-PK5R4LB	15015	37x13.50R18LT RWL	128Q	10 PR	36.5	13.6	10.5 - 11.5	16	73.7	65	3968	-
20"	TBAS-CEJBKPA	15016	245/50R20	105H XL	-	29.7	10.0	7.0 - 8.0	11	32.2	49	2039	-
	TBAS-DFJBKPA	15017	255/55R20	110H XL	-	31.0	10.4	7.5 - 8.5	11	34.4	49	2337	-
	TBAS-FHJR4PA	15018	275/60R20	116T XL	-	33.0	11.0	7.5 - 9.5	13	44.9	50	2756	-
	TBAS-HHJR4LB	15019	LT285/60R20	125/122Q	10 PR	33.5	11.5	8.5 - 10.0	17	59.9	80	3638	3307
	TBAS-LEJR4LA	15020	33x12.50R20LT	121Q	12 PR	32.5	12.5	8.5 - 11.0	17	62.7	80	3197	-
	TBAS-LHJR4LA	15021	35x12.50R20LT	126Q	12 PR	34.5	12.5	8.5 - 11.0	17	67.8	80	3748	-
	TBAS-LKJR4LA	15022	37x12.50R20LT	126Q	10 PR	36.5	12.5	8.5 - 11.0	16	70.9	65	3748	-
22"	TBAS-FELR4PA	15023	275/50R22	115H XL	-	32.9	11.2	7.5 - 9.5	14	45.7	40	2679	-
	TBAS-HDLR4PA	15024	285/45R22	114H XL	-	32.1	11.2	9.0 - 10.5	13	41.9	50	2601	-
	15030	15030	33x12.50R22LT	117R	12 PR	32.5	12.4	9.5 - 10.5	15	61.0	80	2835	-
	15031	15031	35x12.50R22LT	123S	12 PR	34.5	12.5	9.5 - 10.5	15	63.1	80	3415	-
24"	TBAS-KBNR4PA	15025	305/35R24	112H XL	-	32.4	12.3	10.0 - 12.0	13	44.2	50	2469	-
	15032	15032	35x12.50R24LT	123R	12 PR	34.5	12.5	10.0 - 11.0	15	65.2	80	3415	-
26"	15033	15033	35x12.50R26LT	121Q	12 PR	34.5	12.5	11.0 - 12.0	15	64.7	80	3195	-

TRAIL BLADE **ATS** FACTS



Inspired by the strength and versatility of the drop-point blade, the Trail Blade ATS features sidewall elements modeled after this dependable design - known for its controlled handling, broad cutting surface, and easy maintenance. In the same spirit, the ATS delivers durable, flexible performance across a wide range of terrains, offering precise on-road manners, confident off-road capability, and a self-clearing tread that's ready for whatever the trail brings.

TRAIL BLADE A/T

See **page 7** for more Trail Blade A/T details

Rim Size	Atturo Item Number	New Item Number	Size	Speed Rating Load Index	PLY Rating	Overall Diameter Inches	Section Width Inches	Approved Rim Width	Tread Depth 1/32 Inches	Weight LBS	Max PSI	Max Load Single LBS	Max Load Dual LBS
15"	TBAT-10041294	16001	LT235/75R15	104/101S	6 PR	28.9	9.3	6.0 - 8.0	15	36.6	50	1984	1819
	TBAT-10041297	16002	30x9.50R15LT	104S	6 PR	29.5	9.4	6.0 - 8.0	15	38.8	50	1984	-
	TBAT-10041295	16003	31x10.50R15LT	109S	6 PR	30.5	10.6	7.0 - 9.0	15	45.4	50	2271	-
16"	TBAT-10041293	16004	LT215/85R16	115/112S	10 PR	30.4	8.5	5.5 - 7.0	14	39.0	80	2679	2469
	TBAT-10041290	16005	LT225/75R16	115/112S	10 PR	29.3	8.8	6.0 - 7.5	14	39.0	80	2679	2469
	TBAT-10048346	16006	235/70R16	106T	-	29.0	9.4	6.0 - 8.0	13	35.3	44	2094	-
	TBAT-10041291	16007	LT235/85R16	120/116S	10 PR	31.7	9.3	6.0 - 7.5	15	44.3	80	3086	2756
	TBAT-10048345	16008	245/70R16	111T XL	-	29.5	9.8	6.5 - 8.0	13	37.5	50	2403	-
	TBAT-10066633	16009	245/75R16	111T	-	30.5	9.8	6.5 - 8.0	13	37.7	44	2403	-
	TBAT-10041289	16010	LT245/75R16	120/116S	10 PR	30.5	9.8	6.5 - 8.0	15	44.5	80	3086	2756
	TBAT-10048344	16011	255/70R16	111T	-	30.1	10.2	6.5 - 8.5	13	40.1	44	2403	-
	TBAT-10048343	16012	265/70R16	112T	-	30.6	10.7	7.0 - 9.0	13	42.5	44	2469	-
	TBAT-10041288	16013	LT265/75R16	123/120S	10 PR	31.7	10.5	7.0 - 9.0	15	48.7	80	3417	3086
	TBAT-10066644	16014	LT285/75R16	126/123S	10 PR	32.8	11.3	7.5 - 9.5	15	49.6	80	3748	3417
	17"	TBAT-10048348	16015	LT235/80R17	120/117S	10 PR	31.8	9.3	6.0 - 8.0	15	46.3	80	3086
TBAT-10048341		16016	245/65R17	107T	-	29.5	9.8	7.0 - 8.5	13	37.3	44	2149	-
TBAT-10048347		16017	LT245/75R17	121/118S	10 PR	31.5	9.8	6.5 - 8.0	15	48.1	80	3197	2910
TBAT-10048340		16018	265/65R17	112T	-	30.6	10.7	7.5 - 9.5	13	41.9	44	2469	-
TBAT-10048342		16019	265/70R17	115T	-	31.7	10.7	7.0 - 9.0	13	48.5	44	2679	-
TBAT-10041287		16020	LT265/70R17	121/118S	10 PR	31.7	10.7	7.0 - 8.5	15	47.6	80	3197	2910
18"	TBAT-10066630	16021	265/60R18	110T	-	30.5	10.7	7.5 - 9.5	13	39.0	44	2337	-
	TBAT-10048339	16022	265/70R18	116T	-	32.6	10.7	7.0 - 9.0	13	46.3	44	2756	-
	TBAT-10066634	16023	275/65R18	116T	-	32.1	11.0	7.5 - 9.5	13	46.7	44	2756	-
20"	TBAT-10066638	16024	275/55R20	117T XL	-	31.9	11.2	7.5 - 9.5	13	43.4	44	2833	-
	TBAT-10048338	16025	275/60R20	115T	-	33.0	11.0	7.5 - 9.5	13	47.6	44	2679	-
	TBAT-10066642	16026	285/55R20	115T	-	32.4	11.7	8.0 - 10.0	13	44.3	44	2679	-

FIND ATTURO ON ALL MAJOR SOCIAL NETWORKS



@atturotires



TRAIL BLADE *H/T*

See **page 8** for more Trail Blade H/T details

Rim Size	Atturo Item Number	New Item Number	Size	Speed Rating Load Index	PLY Rating	Overall Diameter Inches	Section Width Inches	Approved Rim Width	Tread Depth 1/32 Inches	Weight LBS	Max PSI	Max Load Single LBS	Max Load Dual LBS
16"	TBHT-10125833	18001	LT215/85R16	115/112S	10 PR	30.4	8.5	5.5 - 6.5	14.5	38.5	80	2680	2470
	TBHT-10125835	18002	LT225/75R16	115/112S	10 PR	29.3	8.8	5.5 - 6.5	14.5	37.1	80	2680	2470
	TBHT-10125793	18003	235/65R16C	121/119S	10 PR	28.0	9.4	6.5 - 7.5	12	34.6	83	3195	3000
	TBHT-10125837	18004	LT235/85R16	120/116S	10 PR	31.7	9.3	6.0 - 7.0	14.5	42.4	80	3042	2778
	TBHT-10125838	18005	LT245/75R16	120/116S	10 PR	30.5	9.8	6.5 - 7.5	14.5	41.4	80	3042	2778
	TBHT-10125776	18006	265/70R16	116T XL	-	30.6	10.7	7.5 - 8.5	12	39.6	50	2755	-
	TBHT-10125839	18007	LT265/75R16	123/120S	10 PR	31.7	10.5	7.0 - 8.0	14.5	45.8	80	3415	3085
17"	TBHT-10125791	18008	225/60R17	99H	-	27.6	9.0	6.0 - 7.0	12	31.4	44	1710	-
	TBHT-10125792	18009	225/65R17	102H	-	28.5	9.0	6.0 - 7.0	12	32.0	44	1875	-
	TBHT-10125840	18010	LT235/80R17	120/117S	10 PR	31.8	9.3	6.0 - 7.0	14.5	43.8	80	3085	2835
	TBHT-10125843	18011	LT245/70R17	119/116S	10 PR	30.6	9.8	6.5 - 7.5	14.5	42.0	80	3000	2755
	TBHT-10125841	18012	LT245/75R17	121/118S	10 PR	31.5	9.8	6.5 - 7.5	14.5	43.6	80	3195	2910
	TBHT-10125777	18013	255/65R17	114T XL	-	30.1	10.2	7.0 - 8.0	12	37.7	50	2600	-
	TBHT-10125778	18014	265/70R17	116T XL	-	31.7	10.7	7.5 - 8.5	12	42.0	50	2755	-
TBHT-10125844	18015	LT265/70R17	123/120S	10 PR	31.7	10.7	7.5 - 8.5	14.5	49.0	80	3415	3085	
18"	TBHT-10125780	18016	235/65R18	110T XL	-	30.0	9.5	6.5 - 7.5	12	35.1	50	2335	-
	TBHT-10125781	18017	245/60R18	109H XL	-	29.6	9.8	6.5 - 7.5	12	35.5	50	2270	-
	TBHT-10125783	18018	255/65R18	115H XL	-	31.1	10.2	7.0 - 8.0	12	40.3	50	2680	-
	TBHT-10125784	18019	265/65R18	116T XL	-	31.5	10.7	7.5 - 8.5	12	40.3	50	2755	-
	TBHT-10125845	18020	LT265/70R18	124/121S	10 PR	32.6	10.7	7.5 - 8.5	14.5	50.2	80	3525	3195
	TBHT-10125846	18021	LT275/65R18	123/120S	10 PR	32.1	11.0	7.5 - 8.5	14.5	48.6	80	3415	3085
	TBHT-10125847	18022	LT275/70R18	125/122S	10 PR	33.2	11.0	7.5 - 8.5	14.5	52.7	80	3640	3305
19"	TBHT-10125785	18023	235/55R19	105V XL	-	29.2	9.6	7.0 - 8.0	12	33.8	50	2040	-
	TBHT-10125786	18024	255/60R19	113H XL	-	31.1	10.2	7.0 - 8.0	12	41.2	50	2535	-
20"	TBHT-10125848	18025	LT265/60R20	121/118S	10 PR	32.5	10.7	7.5 - 8.5	14.5	48.3	80	3195	2910
	TBHT-10125787	18026	275/55R20	117S XL	-	31.9	11.2	8.0 - 9.0	12	44.5	50	2835	-
	TBHT-10125788	18027	275/60R20	116H XL	-	33.0	11.0	7.5 - 8.5	12	45.1	50	2755	-
	TBHT-10125850	18028	LT275/65R20	126/123S	10 PR	34.1	11.0	7.5 - 8.5	14.5	54.3	80	3750	3415
22"	TBHT-10125790	18029	285/45R22	114H XL	-	32.1	11.2	9.0 - 10.0	12	44.5	50	2600	-
	TBHT-10125789	18030	275/50R22	115H XL	-	32.9	11.2	8.0 - 9.0	12	46.0	50	2680	-



PLUG-IN HYBRID & ELECTRIC VEHICLES

All Atturo tires are suitable for hybrid and electric vehicles, provided the selected size meets the vehicle's original equipment load and speed ratings. Atturo's robust construction and modern tread designs support the unique torque and performance demands of PH/EV platforms.

TRAIL BLADE **BOSS SXS**

NON-DOT (For Off-Road Use Only)

See **page 10** for more Trail Blade BOSS SXS details

Rim Size	Atturo Item Number	New Item Number	Size	Speed Rating Load Index	PLY Rating	Overall Diameter Inches	Section Width Inches	Approved Rim Width	Tread Depth 1/32 Inches	Weight LBS	Max PSI	Max Load Single LBS	Max Load Dual LBS
14"	SXBO-U1LT4ATA	19001	28x10.00R14	70N	8 PR	28.2	10.2	6.0 - 8.5	23	45.6	38	739	-
	SXBO-U1JU4ATA	19002	29x9.00R14	74N	8 PR	29.2	9.5	5.0 - 7.5	23	46.1	38	827	-
	SXBO-U1NU4ATA	19003	29x11.00R14	75N	8 PR	29.2	11.5	6.5 - 9.5	23	51.8	38	852	-
	SXBO-U1LA4ATA	19004	30x10.00R14	74N	8 PR	30.2	10.5	6.0 - 8.5	23	50.2	38	827	-
	SXBO-U1NA4ATA	19005	30x11.00R14	77N	8 PR	30.2	11.5	6.5 - 9.5	23	53.8	38	908	-
15"	SXBO-U1LA5ATA	19006	30x10.00R15	73N	8 PR	30.5	10.5	6.0 - 8.5	23	50.7	38	805	-
	SXBO-U1NA5ATA	19007	30x11.00R15	75N	8 PR	30.5	11.2	6.5 - 9.5	23	52.2	38	852	-
	SXBO-U1LV5ATA	19008	32x10.00R15	78N	8 PR	32.2	10.5	6.0 - 8.5	23	53.8	38	937	-
	SXBO-U1NV5ATA	19009	32x11.00R15	79N	8 PR	32.5	11.2	6.5 - 9.5	23	56.2	38	936	-
	SXBO-U1LC5ATA	19010	33x10.00R15	80N	8 PR	33.0	10.5	6.0 - 8.5	23	55.8	38	992	-
	SXBO-U1LD5ATA	19011	35x10.00R15	84N	8 PR	35.0	10.5	6.0 - 8.5	23	59.7	38	1102	-

TRAIL BLADE **X/T SXS**

NON-DOT (For Off-Road Use Only)

See **page 11** for more Trail Blade X/T SXS details

Rim Size	Atturo Item Number	New Item Number	Size	Speed Rating Load Index	PLY Rating	Overall Diameter Inches	Section Width Inches	Approved Rim Width	Tread Depth 1/32 Inches	Weight LBS	Max PSI	Max Load Single LBS	Max Load Dual LBS
14"	SXXT-U2LT4ATA	20001	28x10.00R14	70N	8 PR	28.2	10.2	6.0 - 8.5	18	38.6	38	739	-
	SXXT-U2JU4ATA	20002	29x9.00R14	74N	8 PR	29.2	9.5	5.0 - 7.5	18	39.2	38	827	-
	SXXT-U2NU4ATA	20003	29x11.00R14	75N	8 PR	29.2	11.5	6.5 - 9.5	18	43.4	38	852	-
	SXXT-U2LA4ATA	20004	30x10.00R14	74N	8 PR	30.2	10.5	6.0 - 8.5	18	47.0	38	827	-
	SXXT-U2NA4ATA	20005	30x11.00R14	77N	8 PR	30.2	11.5	6.5 - 9.5	18	45.2	38	908	-
15"	SXXT-U2LA5ATA	20006	30x10.00R15	73N	8 PR	30.5	10.5	6.0 - 8.5	18	42.8	38	805	-
	SXXT-U2NA5ATA	20007	30x11.00R15	75N	8 PR	30.5	11.2	6.5 - 9.5	18	43.9	38	852	-
	SXXT-U2LV5ATA	20008	32x10.00R15	78N	8 PR	32.2	10.5	6.0 - 8.5	18	45.4	38	937	-
	SXXT-U2NV5ATA	20009	32x11.00R15	79N	8 PR	32.5	11.2	6.5 - 9.5	18	47.2	38	936	-
	SXXT-U2LC5ATA	20010	33x10.00R15	80N	8 PR	33.0	10.5	6.0 - 8.5	18	47.4	38	992	-
	SXXT-U2LD5ATA	20011	35x10.00R15	84N	8 PR	35.0	10.5	6.0 - 8.5	18	50.7	38	1102	-

INDUSTRY FIRST



24-MONTH** TRAIL HAZARD™ PROTECTION

Included at NO Additional Charge with Atturo Trail Blade SXS Tires

- Flat tire repair protection up to \$40 per tire per occurrence
- If the tire cannot be repaired
 - 100% of Replacement cost* is covered the first year
 - 50% of Replacement cost* is covered the second year

Learn more about the Trail Hazard™ program at atturo.com/trailhazard or scan the QR



AZ850DR

See **page 13** for more AZ850DR details

Rim Size	Atturo Item Number	New Item Number	Size	Speed Rating Load Index	PLY Rating	Overall Diameter Inches	Section Width Inches	Approved Rim Width	Tread Depth 1/32 Inches	Weight LBS	Max PSI	Max Load Single LBS	Max Load Dual LBS
15"	DR850-K040B501	51001	275/60R15	107W	-	28.0	11.2	7.5 - 9.5	5.5	33.9	44	2150	-
	DR850-K040B709	51002	275/40R17	102W XL	-	25.6	10.9	9.0 - 11.0	5.5	29.7	51	1874	-
17"	DR850-K040B717	51003	305/45R17	109W	-	27.7	12.0	9.5 - 11.5	5.5	36.4	44	2271	-
	DR850-K040B725	51004	315/35R17	106Y XL	-	25.5	12.6	10.5 - 12.5	5.5	36.7	51	2094	-
18"	DR850-D3KL8ATA	51005	315/40R18	108Y XL	-	27.8	12.6	10.5 - 12.5	5.5	40.8	51	2205	-
19"	DR850-D3HM9ATA	51006	285/35R19	103Y XL	-	26.7	11.5	9.5 - 11	5.5	31.4	51	1929	-
	DR850-D3JN9ATA	51007	305/30R19	102Y XL	-	26.2	12.3	10.5 - 11.5	5.5	32.9	51	1874	-
20"	DR850-D3GL0ATA	51008	275/40R20	106Y XL	-	28.5	10.9	9.0 - 11.0	5.5	34.1	51	2094	-
	DR850-D3HN0ATA	51009	285/30R20	99Y XL	-	26.7	11.3	9.5 - 10.5	5.5	30.8	51	1709	-
	DR850-D3HM0ATA	51010	285/35R20	104Y XL	-	27.8	11.5	9.5 - 11.0	5.5	32.7	51	1984	-
	DR850-D3JN0ATA	51011	305/30R20	103Y XL	-	27.2	12.3	10.5 - 11.5	5.5	34.5	51	1929	-
	DR850-D3JM0ATA	51012	305/35R20	107Y XL	-	28.3	12.5	10.0 - 12.0	5.5	36.1	51	2150	-
	DR850-D3KN0ATA	51013	315/30R20	104Y XL	-	27.4	12.5	10.5 - 11.5	5.5	35.2	51	1984	-
	DR850-D3KM0ATA	51014	315/35R20	110Y XL	-	28.5	12.6	10.5 - 12.5	5.5	41.7	51	2337	-
	DR850-D3PN0ATA	51015	335/30R20	108Y XL	-	27.8	13.5	11.5 - 12.5	5.5	37.0	51	2205	-



AZ850

See **page 14** for more AZ850 details

Rim Size	Atturo Item Number	New Item Number	Size	Speed Rating Load Index	PLY Rating	Overall Diameter Inches	Section Width Inches	Approved Rim Width	Tread Depth 1/32 Inches	Weight LBS	Max PSI	Max Load Single LBS	Max Load Dual LBS
18"	AZ850-A7CH8AFE	50001	235/60R18	107Y XL	-	28.8	9.4	6.5 - 8.5	10	30.9	50	2149	-
	AZ850-A7DJ8AFE	50002	245/50R18	104Y XL	-	27.7	9.9	7.0 - 8.5	10	29.8	50	1984	-
	AZ850-A7E18AFE	50003	255/55R18	109Y XL	-	29.1	10.2	7.0 - 9.0	10	32.0	50	2271	-
19"	50058	50058	235/35R19	91Y XL	-	25.5	9.5	8.0 - 9.0	10	22.3	49	1356	-
	AZ850-A7CI9AFE	50004	235/55R19	105Y XL	-	29.2	9.6	6.5 - 8.5	10	30.4	50	2039	-
	AZ850-CBHR2PA	50005	245/35R19	93Y XL	-	25.8	9.8	8.0 - 9.0	10	23.0	49	1433	-
	AZ850-A7DI9AFE	50006	245/55R19	103V	-	29.8	9.8	7.0 - 8.5	10	32.4	44	1929	-
	50059	50059	255/35R19	96Y XL	-	26.0	10.2	8.5 - 9.5	10	25.0	49	1565	-
	AZ850-DCHR2PA	50007	255/40R19	100Y XL	-	27.0	10.2	8.5 - 10.0	10	28.3	50	1764	-
	AZ850-A7E19AFE	50008	255/50R19	107Y XL	-	29.1	10.3	7.0 - 9.0	10	34.2	50	2149	-
	50060	50060	265/30R19	93Y XL	-	25.3	10.7	9.0 - 10.0	10	25.5	49	1433	-
	AZ850-A7F19AFE	50009	265/50R19	110Y XL	-	29.4	11.0	7.5 - 9.5	10	34.2	50	2337	-
	50061	50061	275/35R19	100Y XL	-	26.6	10.9	9.0 - 10.0	10	28.9	49	1764	-
	AZ850-FCHR2PA	50010	275/40R19	105Y XL	-	27.7	10.9	9.0 - 11.0	10	31.9	50	2039	-
	AZ850-HAHR2PA	50011	285/30R19	98Y XL	-	25.8	11.4	9.5 - 10.5	10	26.3	49	1653	-
	AZ850-HBHR2PA	50012	285/35R19	103Y XL	-	26.9	11.4	9.5 - 11.0	10	32.3	50	1929	-
	AZ850-A7HK9AFE	50013	285/45R19	111Y XL	-	29.1	11.1	9.0 - 10.5	10	34.6	50	2403	-
AZ850-KAHR2PA	50014	305/30R19	102Y XL	-	26.3	12.3	10.5 - 11.5	10	33.5	50	1874	-	
20"	AZ850-BBJR2PA	50015	235/35R20	92Y XL	-	26.5	9.5	8.0 - 9.0	10	23.4	49	1389	-
	AZ850-BCJR2PA	50016	235/40R20	96Y XL	-	27.4	9.5	8.0 - 9.0	10	27.1	50	1565	-
	AZ850-BDJR2PA	50017	235/45R20	100Y XL	-	28.3	9.3	7.5 - 9.0	10	27.3	50	1764	-
	50062	50062	245/30R20	90Y XL	-	25.8	9.8	8.0 - 9.0	10	22.6	49	1323	-

AZ850 CONTINUED

Rim Size	Atturo Item Number	New Item Number	Size	Speed Rating Load Index	PLY Rating	Overall Diameter Inches	Section Width Inches	Approved Rim Width	Tread Depth 1/32 Inches	Weight LBS	Max PSI	Max Load Single LBS	Max Load Dual LBS
20"	50063	50063	245/35R20	95Y XL	-	26.8	9.8	8.0 - 9.0	10	24.0	49	1521	-
	AZ850-CCJR2PA	50018	245/40R20	99Y XL	-	27.7	9.8	8.0 - 9.5	10	28.0	50	1709	-
	AZ850-CDJR2PA	50019	245/45R20	103Y XL	-	28.7	9.6	7.5 - 9.0	10	29.6	50	1929	-
	50064	50064	255/30R20	92Y XL	-	26.1	10.2	8.5 - 9.5	10	24.5	49	1389	-
	AZ850-DBJR2PA	50020	255/35R20	97Y XL	-	27.0	10.2	8.5 - 10.0	10	28.6	50	1609	-
	AZ850-DEJR2PA	50021	255/50R20	109Y XL	-	30.1	10.4	7.0 - 9.0	10	35.6	50	2271	-
	50065	50065	265/30R20	94Y XL	-	26.3	10.7	9.0 - 10.0	10	26.7	49	1477	-
	AZ850-EBJR2PA	50022	265/35R20	99Y XL	-	27.3	10.7	9.0 - 10.5	10	30.5	50	1709	-
	AZ850-EDJR2PA	50023	265/45R20	108Y XL	-	29.4	10.5	8.5 - 10.0	10	33.2	50	2205	-
	AZ850-FAJR2PA	50024	275/30R20	97Y XL	-	26.5	10.9	9.0 - 10.0	10	27.1	49	1609	-
	AZ850-FBJR2PA	50025	275/35R20	102Y XL	-	27.6	10.9	9.0 - 11.0	10	31.4	50	1874	-
	AZ850-FCJR2PA	50026	275/40R20	106Y XL	-	28.7	10.9	9.0 - 11.0	10	33.4	50	2094	-
	AZ850-FDJR2PA	50027	275/45R20	110Y XL	-	29.8	10.7	8.5 - 10.5	10	33.8	50	2337	-
	AZ850-FEJR2PA	50028	275/50R20	113Y XL	-	30.9	11.2	7.5 - 9.5	10	38.7	50	2535	-
	AZ850-HAJR2PA	50029	285/30R20	99Y XL	-	26.8	11.4	9.5 - 10.5	10	31.1	50	1709	-
	AZ850-HBJR2PA	50030	285/35R20	104Y XL	-	27.9	11.4	9.5 - 11.0	10	33.8	50	1984	-
	AZ850-HCJR2PA	50031	285/40R20	108Y XL	-	29.0	11.4	9.5 - 11.0	10	34.8	50	2205	-
	AZ850-HDJR2PA	50032	285/45R20	112Y XL	-	30.1	11.2	9.0 - 10.5	10	36.2	50	2469	-
	50066	50066	295/30R20	101Y XL	-	27.0	11.9	10.0 - 11.0	10	30.4	49	1819	-
	AZ850-IJR2PA	50033	295/40R20	110Y XL	-	29.0	11.9	10.0 - 11.0	10	35.1	50	1929	-
	AZ850-JDJR2PA	50034	295/45R20	114Y XL	-	30.5	11.7	9.5 - 11.0	10	37.5	50	2601	-
	AZ850-KAJR2PA	50035	305/30R20	103Y XL	-	27.2	12.3	10.5 - 11.5	10	35.0	50	1929	-
	AZ850-KBJR2PA	50036	305/35R20	107Y XL	-	28.4	12.3	10.0 - 12.0	10	36.2	50	2149	-
	AZ850-KEJR2LB	50037	LT305/50R20	123/121H	12 PR	32.0	12.4	8.5 - 11.0	10	53.7	80	3417	3197
	AZ850-LAJR2PA	50038	315/30R20	104Y XL	-	27.5	12.6	10.5 - 11.5	10	35.8	50	1984	-
	AZ850-LBJR2PA	50039	315/35R20	110Y XL	-	28.7	12.6	10.5 - 12.5	10	36.6	50	2337	-
	50067	50067	325/35R20	111Y XL	-	29.0	13.0	11.0 - 12.0	10	36.1	49	2403	-
	21"	50068	50068	245/30R21	91Y XL	-	26.8	9.8	8.0 - 9.0	10	24.1	49	1356
50069		50069	245/35R21	96Y XL	-	27.8	9.8	8.0 - 9.0	10	26.8	49	1565	-
AZ850-DBKR2PA		50040	255/35R21	98Y XL	-	28.0	10.2	8.5 - 9.5	10	27.8	49	1653	-
AZ850-A7FLAAFE		50041	255/40R21	102Y XL	-	29.0	10.2	8.5 - 10.0	10	32.0	50	1874	-
50072		50072	265/30R21	96Y XL	-	27.3	10.7	9.0 - 10.0	10	28.4	49	1565	-
AZ850-A7FLAAFE		50042	265/40R21	105Y XL	-	29.4	10.3	9.0 - 10.5	10	34.0	50	2039	-
AZ850-FBKR2PA		50043	275/35R21	103Y XL	-	28.5	10.9	9.0 - 10.0	10	32.6	49	1929	-
AZ850-A7GKAAFE		50044	275/45R21	110Y XL	-	30.8	10.6	8.5 - 10.5	10	34.4	50	2337	-
AZ850-A7HLAAFE		50045	285/40R21	109Y XL	-	30.1	11.1	9.5 - 11.0	10	37.0	50	2271	-
AZ850-JBKR2PA		50046	295/35R21	107Y XL	-	29.1	11.9	10.0 - 11.5	10	36.1	50	2149	-
AZ850-JCKR2PA		50047	295/40R21	111Y XL	-	30.3	11.9	10.0 - 11.5	10	38.4	50	2403	-
50070		50070	315/35R21	111Y XL	-	29.6	12.6	10.5 - 11.5	10	37.1	49	2403	-
50071		50071	325/25R21	102Y XL	-	27.4	13.2	11.5 - 12.5	10	32.9	49	1874	-

AZ850 CONTINUED

Rim Size	Atturo Item Number	New Item Number	Size	Speed Rating Load Index	PLY Rating	Overall Diameter Inches	Section Width Inches	Approved Rim Width	Tread Depth 1/32 Inches	Weight LBS	Max PSI	Max Load Single LBS	Max Load Dual LBS
22"	AZ850-A7GMBAFE	50048	275/35R22	104Y XL	-	29.6	10.9	9.0 - 11.0	10	35.7	50	1984	-
	AZ850-A7GLBAFE	50049	275/40R22	108Y XL	-	30.7	10.8	9.0 - 11.0	10	35.3	50	2205	-
	AZ850-A7HNBAFE	50050	285/30R22	101Y XL	-	28.8	11.4	9.5 - 10.5	10	34.4	50	1819	-
	AZ850-A7HMBAFE	50051	285/35R22	106Y XL	-	30.0	11.3	9.5 - 11.0	10	35.5	50	2094	-
	AZ850-A7HLBATE	50052	285/40R22	110Y XL	-	31.0	11.4	9.5 - 11.0	10	39.0	50	2337	-
	AZ850-D8HJBATA	50053	LT285/50R22	125/122H	12 PR	33.3	11.7	8.5 - 9.5	10	52.9	95	3638	3307
	AZ850-A7INBAFE	50054	295/30R22	103Y XL	-	29.1	11.8	10.0 - 11.0	10	36.4	50	1929	-
	AZ850-A7JMBAFE	50055	305/35R22	110Y XL	-	30.6	12.2	10.0 - 12.0	10	38.4	50	2337	-
	AZ850-A7KNBAFE	50056	315/30R22	107Y XL	-	29.7	12.3	10.5 - 11.5	10	37.9	50	2149	-
	AZ850-A7PPBAFE	50057	335/25R22	105Y XL	-	28.8	13.2	11.5 - 12.5	10	40.8	50	2039	-

ARTIS

See **page 16** for more ARTIS details

Rim Size	Item Number	Size	Speed Rating Load Index	PLY Rating	Overall Diameter Inches	Section Width Inches	Approved Rim Width	Tread Depth 1/32 Inches	Weight LBS	Max PSI	Max Load Single LBS	Max Load Dual LBS
22"	55010	245/30R22	94W	-	27.8	9.6	TBD	10	TBD	42	1477	-
	55016	HL255/35R22	102W	-	29.0	10.0	TBD	10	TBD	42	1874	-
	55020	HL265/30R22	99W	-	28.3	10.4	TBD	10	TBD	42	1709	-
	55021	HL265/35R22	103W	-	29.3	10.4	TBD	10	TBD	42	1929	-
	55025	275/40R22	107W	-	30.7	10.8	TBD	10	TBD	42	2149	-
	55030	HL285/35R22	109W	-	29.9	11.2	TBD	10	TBD	42	2271	-
	55032	HL285/45R22	116W	-	32.1	11.2	TBD	10	TBD	42	2756	-
	55040	HL305/25R22	102WXL	-	28.0	12.0	TBD	10	33.0	42	1874	-
24"	55050	HL255/30R24	97WXL	-	30.0	10.0	TBD	10	TBD	42	1609	-
	55060	HL275/25R24	98WXL	-	29.4	10.8	TBD	10	TBD	42	1653	-
	55061	HL275/30R24	103WXL	-	30.5	10.8	TBD	10	TBD	42	1929	-
	55062	275/35R24	111WXL	-	31.6	10.8	TBD	10	TBD	49	2903	-
	55071	HL295/25R24	114WXL	-	29.8	11.6	TBD	10	TBD	42	2601	-
	55072	HL295/30R24	111WXL	-	31.0	11.6	TBD	10	TBD	49	2903	-
	55080	HL305/20R24	112WXL	-	28.8	12.0	TBD	10	32.0	42	2469	-
26"	55095	HL295/30R26	109WXL	-	33.0	11.6	TBD	10	TBD	42	2271	-
	55100	HL305/25R26	103WXL	-	32.0	12.0	TBD	10	TBD	42	1929	-
	55072	LT315/35R26 12PR	123H	12 PR	34.7	12.4	TBD	10	TBD	80	2778	-



AZ810

See **page 17** for more AZ810 details

Rim Size	Atturo Item Number	New Item Number	Size	Speed Rating Load Index	PLY Rating	Overall Diameter Inches	Section Width Inches	Approved Rim Width	Tread Depth 1/32 Inches	Weight LBS	Max PSI	Max Load Single LBS	Max Load Dual LBS
16"	AZ810-8FEAJPA	52001	205/55R16	94W XL	-	24.9	8.4	6.0 - 7.0	10	19.4	49	1477	-
	AZ810-9HEAJPA	52002	215/60R16	99V XL	-	26.1	8.7	6.5 - 7.0	10	21.6	44	1521	-
17"	AZ810-9HFJAJPA	52003	215/60R17	100V XL	-	27.2	8.7	6.0 - 7.5	10	24.5	49	1764	-
	AZ810-ADFJAJPA	52004	225/45R17	94Y XL	-	25.0	8.9	7.0 - 8.0	10	21.3	49	1477	-
	AZ810-AEFJAJPA	52005	225/50R17	98W XL	-	25.9	9.2	6.5 - 7.5	10	22.8	49	1653	-
	AZ810-BDFJAJPA	52006	235/45R17	97Y XL	-	25.4	9.3	7.5 - 9.0	10	22.5	49	1609	-
18"	AZ810-ACSJAJPA	52007	225/40R18	92Y XL	-	25.1	9.1	7.5 - 8.5	10	21.3	49	1389	-
	AZ810-ADSJAJPA	52008	225/45R18	95Y XL	-	25.9	8.9	7.0 - 8.5	10	22.5	49	1521	-
	AZ810-BCSJAJPA	52009	235/40R18	95Y XL	-	25.4	9.5	8.0 - 9.0	10	22.3	49	1521	-
	AZ810-BDSJAJPA	52010	235/45R18	98Y XL	-	26.3	9.3	7.5 - 8.5	10	23.5	49	1653	-
	AZ810-BESJAJPA	52011	235/50R18	101W XL	-	27.3	9.6	7.0 - 8.0	10	26.4	49	1819	-
	AZ810-DDSJAJPA	52012	255/45R18	103Y XL	-	27.0	10.0	8.0 - 9.5	10	27.8	49	1929	-
19"	AZ810-ACHJAJPA	52013	225/40R19	93Y XL	-	26.1	9.1	7.5 - 9.0	10	22.3	49	1433	-
	AZ810-ADHJAJPA	52014	225/45R19	96Y XL	-	27.0	8.9	7.0 - 8.5	10	23.6	49	1565	-
	AZ810-BBHJAJPA	52015	235/35R19	91Y XL	-	25.5	9.5	8.0 - 9.0	10	22.7	49	1356	-
	AZ810-BCHJAJPA	52016	235/40R19	96Y XL	-	26.4	9.5	8.0 - 9.0	10	23.4	49	1565	-
	AZ810-BDHJAJPA	52017	235/45R19	99W XL	-	27.4	9.3	7.5 - 9.0	10	25.1	49	1709	-
	AZ810-CCHJAJPA	52018	245/40R19	98Y XL	-	26.7	9.8	8.0 - 9.5	10	23.5	49	1653	-
	AZ810-DEHJAJPA	52019	255/50R19	107W XL	-	29.1	10.4	7.0 - 9.0	10	30.5	49	2149	-
	AZ810-DFHJAJPA	52020	255/55R19	111W XL	-	30.0	10.4	7.5 - 8.5	10	31.7	49	2403	-
20"	AZ810-BBJAJPA	52021	235/35R20	92Y XL	-	26.5	9.5	8.0 - 9.5	10	23.9	49	1389	-
	AZ810-BEJAJPA	52022	235/50R20	104W XL	-	29.3	9.6	7.0 - 8.0	10	28.8	49	1984	-
	AZ810-BFJAJPA	52023	235/55R20	105V XL	-	30.2	9.6	7.0 - 8.0	10	30.2	49	2039	-
	AZ810-CBJAJPA	52024	245/35R20	95Y XL	-	26.8	9.8	8.0 - 9.5	10	24.3	49	1521	-
	AZ810-CDJAJPA	52025	245/45R20	103W XL	-	28.7	9.6	7.5 - 8.5	10	27.5	49	1929	-
	AZ810-DCJAJPA	52026	255/40R20	101Y XL	-	28.0	10.2	8.5 - 9.5	10	28.2	49	1819	-
	AZ810-DDJAJPA	52027	255/45R20	105W XL	-	29.1	10.0	8.0 - 9.0	10	29.8	49	2039	-
	AZ810-FCJAJPA	52028	275/40R20	106W XL	-	28.7	10.9	9.0 - 10.0	10	30.2	49	2094	-
	AZ810-FDJAJPA	52029	275/45R20	110Y XL	-	29.8	10.7	8.5 - 9.0	10	33.1	49	2337	-
	AZ810-FEJAJPA	52030	275/50R20	113Y XL	-	30.9	11.2	7.5 - 9.5	10	38.1	49	2535	-
	AZ810-JDJAJPA	52031	295/45R20	114Y XL	-	30.5	11.7	9.5 - 11.0	10	36.8	49	2601	-
	AZ810-KBJAJPA	52032	305/35R20	107Y XL	-	28.4	12.3	10.0 - 12.0	10	34.3	49	2149	-
	AZ810-KCJAJPA	52033	305/40R20	112Y XL	-	29.6	12.3	10.0 - 12.0	10	35.8	49	2469	-
21"	AZ810-BDKAJPA	52034	235/45R21	101Y XL	-	29.3	9.3	7.5 - 8.5	10	29.5	49	1819	-
	AZ810-CBKAJPA	52035	245/35R21	96Y XL	-	27.8	9.8	8.0 - 9.5	10	26.4	49	1565	-
	AZ810-DBKAJPA	52036	255/35R21	98Y XL	-	28.0	10.2	8.5 - 9.5	10	27.6	49	1653	-
	AZ810-DCKAJPA	52037	255/40R21	102Y XL	-	29.0	10.2	8.5 - 9.5	10	30.0	49	1874	-
	AZ810-ECKAJPA	52038	265/40R21	105Y XL	-	29.3	10.7	9.0 - 10.0	10	32.0	49	2039	-



AZ810 CONTINUED

Rim Size	Atturo Item Number	New Item Number	Size	Speed Rating Load Index	PLY Rating	Overall Diameter Inches	Section Width Inches	Approved Rim Width	Tread Depth 1/32 Inches	Weight LBS	Max PSI	Max Load Single LBS	Max Load Dual LBS
21"	AZ810-EDKAJPA	52039	265/45R21	108Y XL	-	30.4	10.5	8.5 - 10.0	10	33.6	49	2205	-
	AZ810-FBKAJPA	52040	275/35R21	103Y XL	-	28.5	10.9	9.0 - 11.0	10	32.7	49	1929	-
	AZ810-FDKAJPA	52041	275/45R21	110Y XL	-	30.7	10.7	8.5 - 9.5	10	34.8	49	2337	-
	AZ810-HCKAJPA	52042	285/40R21	109Y XL	-	30.0	11.4	9.5 - 11.0	10	35.5	49	2271	-
	AZ810-JBKAJPA	52043	295/35R21	107Y XL	-	29.1	11.9	10.0 - 11.5	10	35.2	49	2149	-
	AZ810-JCKAJPA	52044	295/40R21	111Y XL	-	30.3	11.9	10.0 - 11.5	10	37.2	49	2403	-
22"	AZ810-EBLAJPA	52045	265/35R22	102Y XL	-	29.3	10.7	9.0 - 10.5	10	32.3	49	1874	-
	AZ810-ECLAJPA	52046	265/40R22	106W XL	-	30.4	10.7	9.0 - 10.0	10	33.3	49	2094	-
	AZ810-FCLAJPA	52047	275/40R22	107Y XL	-	30.7	10.9	9.0 - 11.0	10	35.3	49	2205	-
	AZ810-FDLAJPA	52048	275/45R22	112W XL	-	31.8	10.7	8.5 - 10.5	10	36.5	49	2469	-
	AZ810-HBLAJPA	52049	285/35R22	106Y XL	-	29.9	11.4	9.5 - 11.0	10	35.6	49	2094	-
	AZ810-HCLAJPA	52050	285/40R22	110Y XL	-	31.0	11.4	9.5 - 11.0	10	36.5	49	2337	-
	AZ810-KCLAJPA	52051	305/40R22	114V XL	-	31.6	12.3	10.0 - 12.0	10	39.6	49	2601	-
	AZ810-KDLAJPA	52052	305/45R22	118V XL	-	32.8	11.9	9.5 - 11.5	10	41.6	49	2910	-
24"	AZ810-HCNAJPA	52053	285/40R24	112V XL	-	33.0	11.4	9.5 - 10.5	10	38.4	49	2469	-
	AZ810-JBNAJPA	52054	295/35R24	110V XL	-	32.1	11.9	10.0 - 11.5	10	39.6	49	2337	-
	AZ810-JCNAJPA	52055	295/40R24	114V XL	-	33.3	11.9	10.0 - 11.0	10	41.3	49	2601	-
	AZ810-KBNAJPA	52056	305/35R24	112V XL	-	32.4	12.3	10.5 - 11.5	10	40.7	49	2469	-
26"	AZ810-JARAJPA	52057	295/30R26	107V XL	-	33.0	11.9	10.0 - 11.0	10	39.2	51	2149	-
	AZ810-KARAJPA	52058	305/30R26	109V XL	-	33.2	12.3	10.5 - 11.5	10	40.3	51	2271	-

Built to Perform, Priced to Compete.

Howdy,
I'm Andy, Atturo spokesperson and longtime Atturo tire salesman. "Atturo... aren't you just off-road tires?" I get that a lot. Fortunately, Atturo has taken everything they've learned about durability and performance in racing and made a full line of tires for everyday driving. Reliable, tough, all-season tires backed by excellent warranties and inspired by racing experience... You can have that sales pitch. It's worked wonders for me.

- Atturo Andy



AZ610

See **page 18** for more AZ610 details

Rim Size	Atturo Item Number	New Item Number	Size	Speed Rating Load Index	PLY Rating	Overall Diameter Inches	Section Width Inches	Approved Rim Width	Tread Depth 1/32 Inches	Weight LBS	Max PSI	Max Load Single LBS	Max Load Dual LBS
15"	AZ610-10064532	53001	205/70R15	96H	-	26.3	8.2	5.0 - 7.0	10	25.8	44	1565	-
	AZ610-10064522	53002	215/70R15	98H	-	26.9	8.7	5.5 - 7.0	10	28.2	44	1653	-
	AZ610-10064528	53003	225/70R15	100H	-	27.4	9.0	6.0 - 7.5	10	30.4	44	1764	-
16"	AZ610-10064519	53004	215/70R16	100H	-	27.9	8.7	5.5 - 7.0	10	29.5	44	1764	-
	AZ610-10064520	53005	225/70R16	103H	-	28.4	9.0	6.0 - 7.5	10	30.9	44	1929	-
	AZ610-10064510	53006	235/70R16	106H	-	29.0	9.4	6.0 - 8.0	10	31.5	44	2094	-
	AZ610-10064512	53007	245/70R16	111H XL	-	29.5	9.8	6.5 - 8.0	10	35.1	50	2403	-
	AZ610-10064511	53008	265/70R16	112H	-	30.6	10.7	7.0 - 9.0	10	39.0	44	2469	-
	AZ610-10064534	53009	265/75R16	116T	-	31.7	10.5	7.0 - 9.0	10	41.0	44	2756	-
17"	AZ610-10064513	53010	225/65R17	102H	-	28.5	9.0	6.0 - 8.0	10	29.3	44	1874	-
	AZ610-10064516	53011	235/65R17	108H XL	-	29.1	9.4	6.5 - 8.5	10	31.7	50	2205	-
	AZ610-10064527	53012	235/70R17	111H XL	-	30.0	9.4	6.0 - 8.0	10	34.2	50	2403	-
	AZ610-10064515	53013	245/65R17	111H XL	-	29.5	9.8	7.0 - 8.5	10	34.0	50	2403	-
	AZ610-10064517	53014	245/70R17	110H	-	30.6	9.8	6.5 - 8.0	10	36.2	44	2337	-
	AZ610-10064526	53015	265/65R17	112H	-	30.6	10.7	7.5 - 9.5	10	39.0	44	2469	-
18"	AZ610-10064535	53016	265/70R17	115H	-	31.7	10.7	7.0 - 9.0	10	39.7	44	2679	-
	AZ610-10064521	53017	235/55R18	104V XL	-	28.1	9.6	6.5 - 8.5	10	31.1	50	1984	-
	AZ610-10064524	53018	255/55R18	109V XL	-	29.0	10.4	7.0 - 9.0	10	35.7	50	2271	-
20"	AZ610-10064523	53019	265/60R18	110H	-	30.5	10.7	7.5 - 9.5	10	38.6	44	2337	-
	AZ610-10064530	53020	265/50R20	112V XL	-	30.5	10.9	7.5 - 9.5	10	39.9	50	2469	-
	AZ610-10064525	53021	275/55R20	117V XL	-	31.9	11.2	7.5 - 9.5	10	41.9	50	2833	-
	AZ610-10064533	53022	285/50R20	112V	-	31.3	11.7	8.0 - 10.0	10	41.7	44	2469	-



SHARE YOUR WORK

Upload photos of customer vehicles equipped with Atturo Tires to be featured online, helping drivers discover your shop and the services you offer. Visit atturo.com/gallery or scan the QR code to submit your images.



CHECK OUT ALL CURRENT GALLERY SUBMISSIONS AT ATTURO.COM/GALLERY

AZ600

See **page 19** for more AZ600 details

Rim Size	Atturo Item Number	New Item Number	Size	Speed Rating Load Index	PLY Rating	Overall Diameter Inches	Section Width Inches	Approved Rim Width	Tread Depth 1/32 Inches	Weight LBS	Max PSI	Max Load Single LBS	Max Load Dual LBS
16"	AZ600-10117302	54001	215/65R16	102H XL	-	27.0	8.7	6.0 - 7.0	10	26.1	50	1875	-
	AZ600-10048353	54002	225/55R17	101H XL	-	26.8	9.2	6.0 - 8.0	10	28.0	50	1819	-
17"	AZ600-10117303	54003	225/60R17	99H	-	27.6	9.0	6.0 - 8.0	10	28.9	44	1710	-
	AZ600-10117304	54004	235/60R17	102H	-	28.1	9.4	6.5 - 7.5	10	31.1	44	1875	-
18"	AZ600-10117307	54005	225/55R18	98V	-	27.8	9.2	6.5 - 7.5	10	30.0	44	1655	-
	AZ600-10117308	54006	225/60R18	100H	-	28.6	9.0	6.0 - 7.0	10	30.2	44	1765	-
	AZ600-10117309	54007	235/60R18	107V XL	-	29.1	9.4	6.5 - 7.5	10	31.2	50	2150	-
	AZ600-10125339	54008	235/65R18	110H XL	-	30.0	9.5	6.5 - 7.5	10	31.5	50	2335	-
	AZ600-10117310	54009	245/60R18	105V	-	29.6	9.8	6.5 - 7.5	10	33.8	44	2040	-
	AZ600-10117312	54010	255/65R18	111H	-	31.1	10.2	7.0 - 8.0	10	37.8	44	2405	-
	AZ600-10117316	54011	275/65R18	116H	-	32.1	11.0	7.5 - 8.5	10	41.6	44	2755	-
19"	AZ600-10125340	54012	225/55R19	99V	-	28.8	9.2	6.5 - 7.5	10	31.6	44	1710	-
	AZ600-10125411	54013	235/45R19	99H XL	-	27.4	9.3	7.5 - 8.5	10	28.9	44	1710	-
	AZ600-10125343	54014	235/50R19	99V	-	28.3	9.7	7.0 - 8.0	10	29.8	44	1710	-
	AZ600-10125341	54015	235/55R19	105V XL	-	29.2	9.7	7.0 - 8.0	10	31.5	50	2040	-
	AZ600-10125342	54016	245/55R19	107H XL	-	29.7	10.0	7.0 - 8.0	10	32.7	50	2150	-
20"	AZ600-10125412	54017	235/55R20	105V XL	-	30.2	9.7	7.0 - 8.0	10	32.8	50	2040	-
	AZ600-10125414	54018	245/50R20	105V XL	-	29.7	10.0	7.0 - 8.0	10	33.1	50	2040	-
	AZ600-10125415	54019	255/50R20	109H XL	-	30.1	10.4	7.5 - 8.5	10	34.5	50	2270	-
	AZ600-10125413	54020	255/55R20	110H XL	-	31.0	10.4	7.5 - 8.5	10	36.3	50	2335	-
	AZ600-10117317	54021	275/60R20	115H	-	33.0	11.0	7.5 - 8.5	10	44.4	44	2680	-
22"	AZ600-10125416	54022	275/50R22	115H XL	-	32.9	11.2	7.5 - 8.5	10	42.4	50	2680	-
	AZ600-10125417	54023	285/45R22	114H XL	-	32.1	11.2	7.5 - 8.5	10	41.0	50	2600	-

Carry a Tire With Sales That Never Flatten.

I'm Andy, Atturo spokesperson and longtime Atturo tire salesman. Let me tell you, it's the easiest job in the world. People walk in, I tell them about Atturo's full line of everyday, all-season tires backed by excellent warranties and inspired by racing experience, and they say, "I'll take them." It's a consistently profitable business model, and we promise to be good partners in it with you.

- *Atturo Andy*



CV400

See **page 21** for more CV400 details

Rim Size	Atturo Item Number	New Item Number	Size	Speed Rating Load Index	PLY Rating	Overall Diameter Inches	Section Width Inches	Approved Rim Width	Tread Depth 1/32 Inches	Weight LBS		Max Load Single LBS	Max Load Dual LBS
16"	CV400-10066653	70001	205/65R16C	107/105R	8 PR	26.5	8.2	5.5 - 6.5	11	27.6	69	2149	2039
	CV400-10066649	70002	205/75R16C	110/108R	8 PR	28.1	8.0	5.5 - 6.5	11	31.2	69	2337	2205
	CV400-10066647	70003	215/65R16C	109/107R	8 PR	27.0	8.7	6.0 - 7.0	11	29.7	69	2271	2149
	CV400-10066650	70004	215/75R16C	113/111R	8 PR	28.7	8.5	5.5 - 7.0	11	33.0	69	2535	2403
	CV400-10066652	70005	225/75R16C	121/120R	10 PR	29.3	8.8	6.0 - 7.0	11	35.0	83	3197	3086
	CV400-10066645	70006	235/65R16C	121/119R	10 PR	28.0	9.4	6.5 - 7.5	11	34.7	83	3197	2998

ST300

See **page 22** for more ST300 details


Rim Size	Atturo Item Number	New Item Number	Size	Speed Rating Load Index	PLY Rating	Overall Diameter Inches	Section Width Inches	Approved Rim Width	Tread Depth 1/32 Inches	Weight LBS	Max PSI	Max Load Single LBS	Max Load Dual LBS
12"	ST320-10131639	90001	ST145R12	95/90M	10PR	21.3	5.8	4.0	9	13.2	80	1520	1320
13"	ST300-10127291	90003	ST175/80R13	91/87M	6PR	24.0	7.0	4.5 - 5.5	9	16.9	50	1360	1200
	ST320-10131642	90004	ST185/80R13	99/95M	8PR	24.6	7.2	4.5 - 6.0	9	16.9	50	1709	1609
14"	ST300-10122899	90005	ST205/75R14	105/101M	8PR	26.1	8.0	5.0 - 6.5	9	22.4	65	2040	1820
	ST300-10122900	90006	ST215/75R14	108/103M	8PR	26.7	8.5	5.5 - 6.5	9	25.4	65	2200	1930
15"	ST300-10122901	90008	ST205/75R15	107/102M	8PR	27.1	8.0	5.0 - 6.5	9	23.9	65	2150	1870
	ST300-10122902	90009	ST225/75R15	117/112M	10PR	28.3	8.8	5.5 - 6.5	9	29.7	80	2830	2470
	ST300-10122903	90010	ST225/75R15	121/117M	12PR	28.3	8.8	5.5 - 6.5	9	32.3	95	3195	2835
16"	ST300-10122904	90011	ST235/80R16	123/119M	10PR	30.8	9.3	6.0 - 7.5	10	35.9	80	3527	3086
	ST340-10131353	90012	ST235/80R16	129/125M ALL-STEEL	14PR	30.8	9.3	6.0 - 7.5	10	56.2	110	4079	3638
	ST320-10131644	90014	ST235/85R16	128/124M	12PR	31.8	9.3	6.0 - 7.5	11	57.5	95	3968	3527
	ST340-10131354	90013	ST235/85R16	132/127M ALL-STEEL	14PR	31.8	9.3	6.0 - 7.5	11	57.5	110	4409	3858
17.5"	ST340-10131355	90015	215/75R17.5	135/133L ALL-STEEL	16PR	30.2	8.5	-	12	54.9	122	4806	4541
	ST340-10131356	90016	235/75R17.5	143/141L ALL-STEEL	16PR	31.4	9.3	-	12	59.6	127	6008	5677



IS YOUR SHOP LISTED?

Make sure customers can find you! Visit our Dealer Locator page at atturo.com/newdealer or scan the QR code to confirm your shop's listing and verify accuracy.

ATTURO TIRES

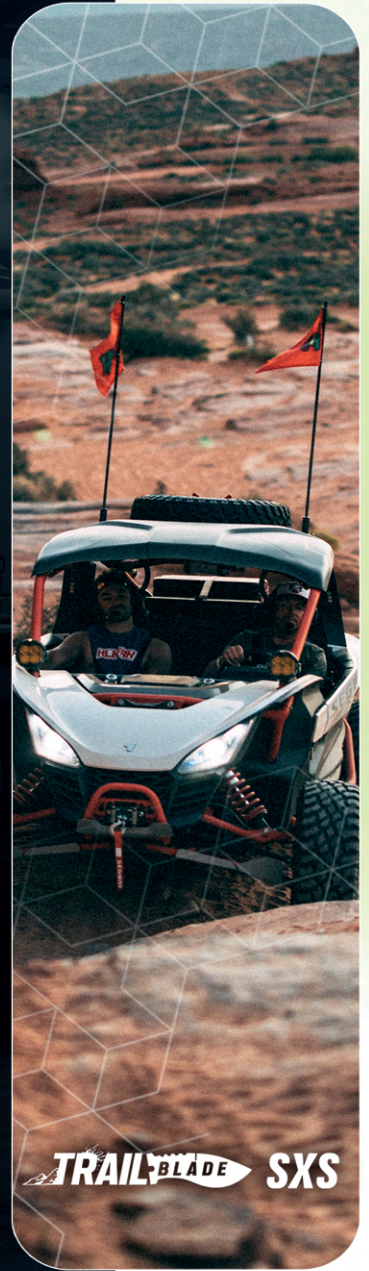

ATTURO TIRE CORP.

3250 N. OAK GROVE AVE. WAUKEGAN, IL 60087

PHONE: 855.632.8031

E-MAIL: INFO@ATTURO.COM

www.atturo.com